

AMP FIBIAN®

RV
PLUS™

WEATHERPROOF
CARAVAN / RV
15A TO 10A POWER ADAPTOR
RCD & OVERLOAD
PROTECTION

Plug-lead connects to
regular 10A powerpoint!

IP-55



Extension lead connects to
caravan/RV/campertrailer

- 240V 10A 2400W circuit breaker
- R.C.D. for personal protection
- Weatherproof to IP-55
- Accepts ordinary & heavy-duty caravan leads to ø12mm
- Padlock attachment point locks lid
- Power indicator light in socket


- Very compact - great for travelling
- L-Class for private use
- Certified to comply with Australian Standards AS/NZS-3190 & AS/NZS-3001
- Impact resistant to IK-08
- Two year warranty
- Designed & Made in Australia



DESIGNED
IN AUSTRALIA



The perfect adaptor for travellers:
compact, weatherproof & safe!

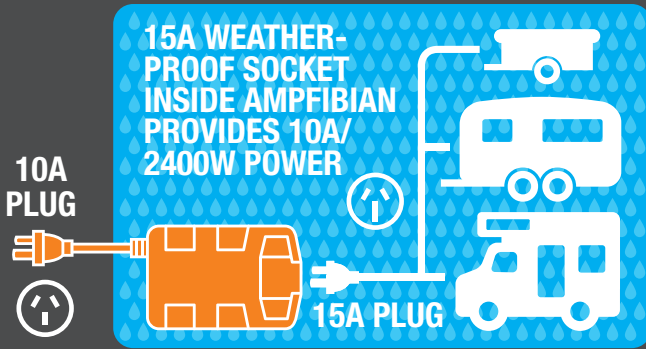

The Ampfibian® RV-PLUS is the perfect power adaptor for caravan/RV owners. Compact for travel, and weatherproof for outdoor use, it lets 15A devices connect legally to 10A power points and includes fast acting earth leakage safety protection.

It is water resistant to IP-55 (jets of water from all directions) and made from impact resistant plastic. The RV-PLUS works with ordinary and heavy-duty caravan leads up to 12mm diameter.

Independently tested and certified, it meets all applicable Australian Standards and recommendations:

AS/NZS-3190:2016 "Approval and test specification – Residual current devices (current-operated earth-leakage devices)" which includes portable R.C.D.s, and AS/NZS-3001:2008/Amdt 1:2012 "Electrical Installations – Portable structures and vehicles including their site supplies".

The RV-PLUS will not convert 10A to 15A. The functionality of a connected device may be limited if it is used to its full capacity. Contact Ampfibian for further information.

R.C.D.s will not prevent shock but will minimise the effects by shutting the power off quickly.

ADAPT & PROTECT:

NO MORE DEATH LEADS

Death-leads are 10A to 15A leads with a 15A socket at one end, and an illegally modified plug on the other. Commonly used by caravan and RV owners, they breach all electrical standards and create potentially lethal electrical connections.

Household powerpoints can safely supply 10A, well below the current drawn by 15A devices. The electrical hazards involved in connecting a 10A mains source to a 15A device are the reason 15A plugs do not fit into 10A powerpoints.

Many people are using illegally modified plugs to circumvent this protection, putting themselves, their property and the people around them at risk. Insurance does not cover damage caused by illegally modified equipment.

SPECIFICATION

- Meets all Australian Standards
- 10A 2400W circuit breaker
- Residual Current Device (R.C.D.), 30mA, 2-pole isolation
- 240VAC 50Hz
- Ingress protected to IP-55 (weatherproof)
- Power input plug 10A on 1.6m lead
- Sealed output socket fits 15A plug
- Shipping weight 0.9kg (2lb)
- Shipping size 165 x 260 x 83mm (6.5" x 10.25" x 3.25")
- Product size without leads 130 x 230 x 78mm (5.25" x 9" x 3")



Images are for illustrative purposes only, actual goods may differ.