



**FULL
BOAR**

WET & DRY VACUUM

- **50L STAINLESS STEEL TANK**
- **1500W MOTOR**
- **TRANSPORT TROLLEY**



INSTRUCTION MANUAL





WARNING: Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury. Save all warnings and instructions for future reference.


SPECIFICATIONS - MODEL NO. FBT-5000

Mains Voltage:	230 – 240V ~ 50Hz
Input Power:	1500W
Power Outlet Max.:	900W
Psum:	2400W
Suction Power Max.:	170 mbar
Tank Capacity:	50 l
IP Rating	IP24
Weight:	14.5 kg

KNOW YOUR PRODUCT

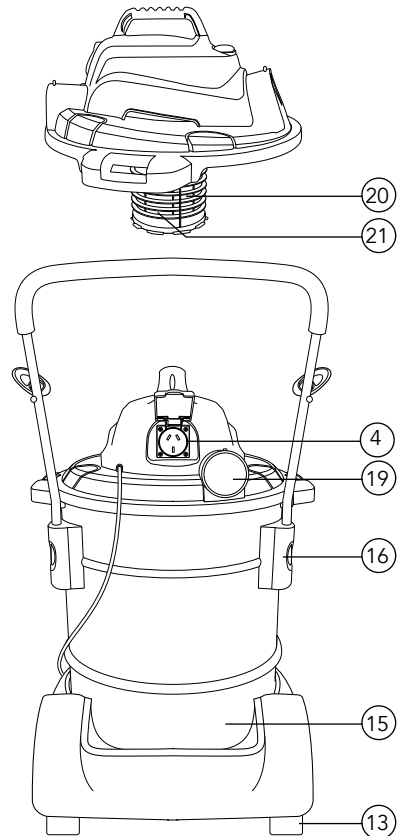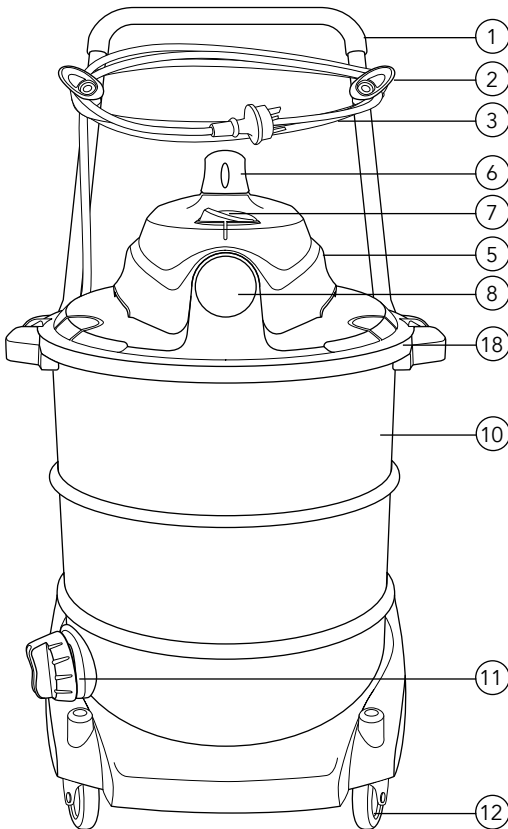

KNOW YOUR PRODUCT (cont.)

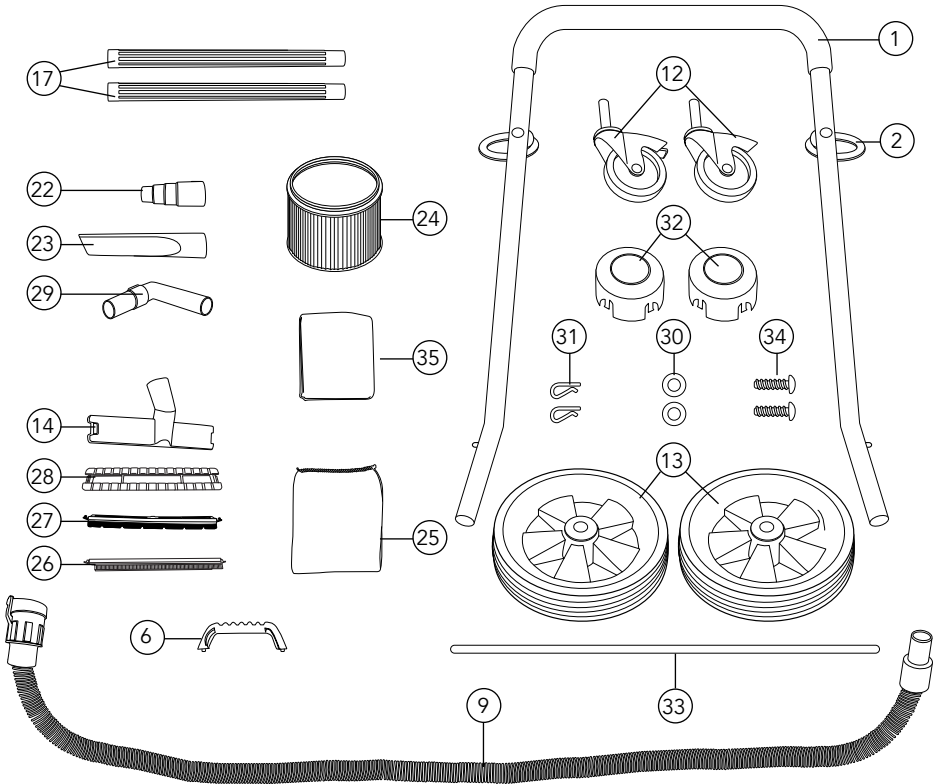

- | | | |
|------------------------------------|---|--|
| 1. Main Handle | 15. Accessory Compartment | 28. Combination Nozzle attachment for carpets |
| 2. Cable Hook | 16. Holder for Handle | 29. Air Regulator |
| 3. Power Cable | 17. 2-Piece Suction Tube | 30. 2 x Washers for fitting the wheels |
| 4. Automatic Power Take Off Outlet | 18. Locking Hook | 31. 2 x R-clip for fitting the wheels |
| 5. Head | 19. Blow Outlet | 32. 2 x Covers for fitting the wheels |
| 6. Carry handle | 20. Filter Cage | 33. Axle for fitting the wheels |
| 7. ON/OFF/Automatic Switch | 21. Safety Float Valve | 34. 2 x Phillips-Hd screws for fitting the head handle |
| 8. Suction Hose Connection | 22. Hose Step Down Adaptor | 35. Tank Bag (Dry) |
| 9. Flexible Suction Hose | 23. Crevice Nozzle | |
| 10. Tank | 24. Pleated Filter (Dry) | |
| 11. Water Drain Outlet | 25. Foam Filter (Wet) | |
| 12. Castors (1 braked) | 26. Combination Nozzle attachment for wet vacuum cleaning | |
| 13. Wheels | 27. Combination Nozzle attachment for smooth floors | |
| 14. Dual Purpose Nozzle | | |

TABLE OF CONTENTS

SPECIFICATIONS.....	Page 02
KNOW YOUR PRODUCT.....	Page 02
INTRODUCTION.....	Page 05
SAFETY INSTRUCTIONS.....	Page 05
ASSEMBLY.....	Page 10
SUCTION NOZZLES.....	Page 13
OPERATION.....	Page 14
MAINTENANCE.....	Page 16
DESCRIPTION OF SYMBOLS.....	Page 17
CONTENTS.....	Page 18
WARRANTY.....	Page 20

INTRODUCTION

Congratulations on purchasing a Full Boar Wet and Dry Vac.

The Full Boar Wet and Dry Vac is designed for wet and dry vacuuming using the appropriate filter. The appliance is not suitable for the vacuuming of combustible, explosive or harmful substances.

SAFETY INSTRUCTIONS



WARNING! When using mains-powered equipment, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, personal injury and material damage.

Read and understand the manual prior to operating this tool.

Save these instructions and other documents supplied with this tool for future reference.

ELECTRICAL SAFETY

The electric motor has been designed for 230V and 240V only. Always check that the power supply corresponds to the voltage on the rating plate.

Note: The supply of 230V and 240V on Full Boar tools are interchangeable for Australia and New Zealand.

Note: The power outlet used for the vacuum must be protected by a 30mA residual current device or earth leakage circuit breaker.

The supply cord assessed as type Y attached by using AS/NZS 60335.1.

If the supply cord is damaged, it must be replaced by an electrician or a power tool repairer in order to avoid a hazard.

Using an Extension Lead

Always use an approved extension lead suitable for the power input of this tool. Before use, inspect the extension lead for signs of damage, wear and ageing. Replace the extension lead if damaged or defective. When using an extension lead on a reel, always unwind the lead completely. Use of an extension lead not suitable for the power input of the tool or which is damaged or defective may result in a risk of fire and electric shock.

GENERAL POWER TOOL SAFETY WARNINGS



WARNING! Read all safety warnings and instructions. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury. The term "Power Tool" in all of the warnings listed below refers to your mains operated (corded) power tool or battery operated (cordless) power tool.

SAVE THESE INSTRUCTIONS

1. Work area safety

- a. **Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- b. **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
- c. **Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.

2. Electrical safety

- a. **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
- b. **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
- c. **Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- d. **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.
- e. **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f. **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** Use of an RCD reduces the risk of electric shock.

3. Personal safety

- a. **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- b. **Use personal protective equipment. Always wear eye protection.** Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- c. **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

GENERAL POWER TOOL SAFETY WARNINGS (cont.)

- d. **Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
 - e. **Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
 - f. **Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts.** Loose clothes, jewellery or long hair can be caught in moving parts.
 - g. **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.
- ### 4. Power tool use and care
- a. **Do not force the power tool. Use the correct power tool for your application.** The correct power tool will do the job better and safer at the rate for which it was designed.
 - b. **Do not use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
 - c. **Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools.** Such preventive safety measures reduce the risk of starting the power tool accidentally.
 - d. **Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** Power tools are dangerous in the hands of untrained users.
 - e. **Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use.** Many accidents are caused by poorly maintained power tools.
 - f. **Keep cutting tools sharp and clean.** Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
 - g. **Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** Use of the power tool for operations different from those intended could result in a hazardous situation.
- ### 5. Service
- a. **Have your power tool serviced by a qualified repair person using only identical replacement parts.** This will ensure that the safety of the power tool is maintained.
 - b. **If the supply cord is damaged,** it must be replaced by an electrician or a power tool repairer in order to avoid a hazard.

WET & DRY VACUUM SAFETY WARNINGS



IMPORTANT! When using the equipment, a few safety precautions must be observed to avoid injuries and damage. Please read the complete operating manual with due care. Keep this manual in a safe place so that the information is available at all times. If you give the equipment to any other person, give them these operating instructions as well.

The manufacturer cannot accept any liability for damage or accidents which arise due to a failure to follow these instructions and the safety information.



WARNING! DO NOT connect power tools to outlet when using the vacuum for wet pick up.

- **Do not leave appliance unattended when plugged in.** Unplug from outlet when not in use and before servicing and cleaning.
- **To avoid electric shock, do not expose to rain.** Store indoors.
- **Never use in the presence of explosive liquids, vapours or explosive dust** – such as coal or grain.
- **Never pick up asbestos or asbestos dust.**
- **Wood dust and chips in a confined area can give rise to fire or an explosion.** Guard against possible ignition sources.
- **Do not pick up anything that is burning or smouldering** – such as metal grinding dust, cigarette ends, hot coals, matches or similar.
- **The appliance is not intended for use by young children or infirm persons without supervision.** Young children should be supervised to ensure they do not play with the appliance.
- **Use only manufacturer's recommended attachments and consumables.**
- **Never modify the cleaner in any way** - this is dangerous and will invalidate the warranty.
- **Do not use cleaner without the filter in place.**
- **If motor sound becomes higher pitched always check for the following:**
 - Blocked hose or accessory. - Blocked filter - Full container.
- **Never try to move the cleaner by pulling with the mains lead.**
- **Always check that the filter is clear and not blocked.** Keep all openings clear of any blockages.
- **When lifting the unit, always lift it with the handle or under rim of bucket.** Beware of excess weight.
- **Always switch the unit off before changing attachments or connecting different power tools.**
- **Always disconnect equipment from the appliance when it is not in use.**
- **If the cordset is damaged have it repaired by an authorised service centre.**

WET & DRY VACUUM SAFETY WARNINGS (cont.)

- **This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge,** unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- **Children should be supervised to ensure that they do not play with the appliance.**
- **The wet and dry vacuum cleaner is designed for wet and dry vacuuming using the appropriate filter.** The appliance is not suitable for the vacuuming of combustible, explosive or harmful substances.
- **The equipment is to be used only for its prescribed purpose.** Any other use is deemed to be a case of misuse. The user / operator and not the manufacturer will be liable for any damage or injuries of any kind caused as a result of this.

ASSEMBLY



WARNING! During assembly ensure the wet and dry vac is switched OFF and disconnected from the power supply.

Fitting the wheels (13):

1. Place a R-clip (31) for fitting the wheels through the appropriate hole in the axle (33) (Fig. 1).
2. Fit a washer (30) and a wheel (13) to the axle (33) (Fig. 2).
3. Now slide the axle (33) through the guides provided for it on the underside of the Tank (10) (Fig. 3).




Fig. 1




Fig. 2




Fig. 3

4. Fit the second wheel (13) to the empty end of the axle (33) and secure it with the other washer (30) and the R-clip (31).
5. Push the covers (32) on to the outside of the wheels (13) so that the hooks on the covers (32) clip into the slots in the wheel (13). (Fig. 4).




Fig. 4

Fitting the castors (12):

1. Fit the castors (12) into the appropriate mountings on the underside of the tank (10). Push the castors (12) firmly into the mounting until they engage with a clicking noise (Fig. 5).




Fig. 5

Fitting the main handle (1):

1. Place the main handle (1) into the handle holders (16). Push downwards until the retractable locators on the main handle (1) click into the holes in the handle holders (16) (Fig. 6).







Fig. 6

ASSEMBLY (cont.)


Fitting the appliance head (5):

1. The appliance head (5) is fastened to the container (10) by the locking hooks (18) (Fig. 7).
2. To remove the appliance head (5), open the locking hooks (18) and lift the appliance head (5) (Fig. 8).
3. When fitting the appliance head (5), make sure that the locking hooks (18) lock into place correctly (Fig 9).



Fitting the head handle (6):

1. Place the head handle (6) on top of the appliance head (5), so that it sits securely in the moulded indents. Fix the head handle in place (fits one direction only) with the supplied Phillips head screws (34) (Fig.10).



Fitting the filter




IMPORTANT! Never use the wet and dry vacuum cleaner without a filter. Check that the filter is securely fitted at all times.

Fitting the foam filter (25) - vacuuming liquid:

1. For wet vacuuming, slip the supplied foam filter (25) over the filter cage (20) (Fig.11).


Note. The pleated filter (24), already fitted upon delivery is not suitable for wet vacuuming.



Fitting the pleated filter (24) - vacuuming dry matter:

1. For dry vacuum cleaning always use the pleated filter. If it is not fitted, slip it over the filter cage (20), turn the pleated filter's base in a clockwise direction to tighten (Fig. 12). The pleated filter (24) is suitable for dry-vacuuming only.


Note: Do not use the **foam filter (25)** when vacuuming dry mater.



ASSEMBLY (cont.)

Fitting the Tank bag (35) - vacuuming dry matter:

Place the Tank bag (35) inside the Tank, with the elastic mouth of the bag stretched around the outside of the Tank's rim (Fig. 13).




Fitting the suction hose (9):

Connect the suction hose (9) to the corresponding connector on the wet and dry vacuum cleaner, depending on the application required.


Vacuuming

Connect the suction hose (9) to the suction hose connector (8) (Fig. 14).




Blowing

Connect the suction hose (9) to the blow connector (19) (Fig. 15).




To extend the suction hose (9) you can attach one or more of the elements which make up the 2-part suction tube (17) to the suction hose (9) (Fig. 16).



Air regulator (29):

The air regulator (29) can be fitted between the suction hose (9) and the suction tube (17) (Fig. 17). The suction power of the nozzle can be adjusted by twisting the band on the air regulator (29).




SUCTION NOZZLES

Dual-purpose nozzle (14):


The dual-purpose nozzle (14) is for vacuuming solids and liquids over medium to large areas (Fig. 18).

Various attachments can be fitted to the dual-purpose nozzle depending on what sort of work you wish to carry out:




Wet vacuuming

Use the attachment for wet vacuuming (Fig. 19).




Vacuuming smooth flooring

Use the attachment for smooth floors (Fig. 20).




Vacuuming carpets

Use the attachment for carpets (Fig. 21).




Fit the appropriate attachment into the dual-purpose nozzle (14) from underneath and secure it using the side lugs (Fig. 22).

Ensure that the attachments are perfectly secure.



Crevice nozzle (23):

The crevice nozzle (23) is designed for vacuuming solids and liquids in corners, edges and other areas that are difficult to access (Fig. 23).



OPERATION


This vacuum must be used with a residual current device with a rated residual current of 30mA or less.

ON/OFF switch (7) (Fig. 24)

Switch position 0: Off


Switch position I: Normal operation

Switch position II: Automatic mode




Dry vacuuming

Use the pleated filter (24) for dry vacuuming (see **Fitting the pleated filter**).



The Tank bag (35) can also be fitted for removal of particularly heavy dirt (see **Fitting the Tank bag**).


Always ensure that the filters are perfectly secure.



Wet vacuuming

For wet-vacuuming, use the foam filter (25) (see **Fitting the foam filter**).


Check that the filter is securely fitted at all times.



Water drain outlet

To make the Tank (10) easier to empty after wet vacuuming, it is fitted with a water drain outlet (11).

Open the water drain outlet (11) by turning it anti-clockwise (Fig. 28) and drain the liquid.



IMPORTANT! When wet vacuuming, the floating safety switch (21) turns off the wet and dry vacuum cleaner automatically when the maximum level is reached.



IMPORTANT! The wet and dry vacuum cleaner is not suitable for the vacuuming of combustible liquids. For wet vacuuming, use only the supplied foam filter.

OPERATION (cont.)

Automatic mode (900W max.):




Connect the power cable on your electric tool to the automatic power take off outlet (4) and connect the suction hose (9) to the extractor connector on your electric tool. Check that the connections are secure and airtight.

You can use the supplied hose step down adaptor (22) to connect the suction hose (9) to the electric tool. To do so, fit it between the suction hose and the extractor port on the electric tool.

Set the switch (7) on the wet and dry vacuum cleaner to position II, automatic mode. The moment you switch on the electric tool, the wet and dry vacuum cleaner switches on as well. When you switch off the electric tool, the wet and dry vacuum cleaner switches off as well after a preset delay.

Blowing

Connect the suction hose (9) to the blow connector (19) on the wet and dry vacuum cleaner.

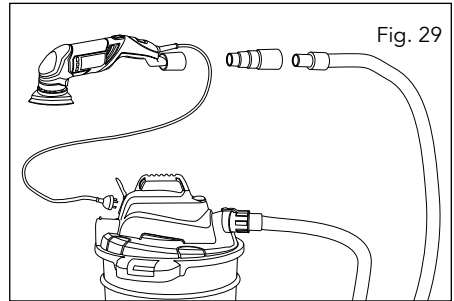

MAINTENANCE



IMPORTANT! Before cleaning your wet & dry vac or carrying out any maintenance procedure, make sure that the motor is off and the vac disconnected from the power supply to prevent accidental starting.

Cleaning

Keep all safety devices, air vents and the motor housing free of dirt and dust as far as possible. We recommend that you clean the appliance immediately after you use it.

Cleaning the appliance head (5)

Clean the appliance regularly with a damp cloth and some soft soap. Do not use cleaning agents or solvents; these may be aggressive to the plastic parts in the appliance.

Cleaning the Tank (10)

The container can be cleaned with a damp cloth and some soft soap or under running water, depending on the amount of dirt.

Cleaning the filters

Cleaning the pleated filter (24)

Clean the pleated filter (24) regularly by carefully patting it and cleaning it with a fine brush or hand brush.




Cleaning the foam filter (25)

Clean the foam filter (25) with a little soft soap under running water and allow it to air-dry.

Maintenance

At regular intervals and before each use, check that the filters in the wet and dry vacuum cleaner are securely fitted.

DESCRIPTION OF SYMBOLS

V	Volts	Hz	Hertz
~	Alternating current	W	Watts
/min	Revolutions or reciprocation per minute	No	No load speed
l	Litres		Regulator compliance mark
	Read instruction manual		Warning
IPX4	Ingress protection from water	mbar	Pressure rating (millibar)

CARING FOR THE ENVIRONMENT



Power tools that are no longer usable should not be disposed of with household waste but in an environmentally friendly way. Please recycle where facilities exist. Check with your local council authority for recycling advice.



Recycling packaging reduces the need for landfill and raw materials. Reuse of recycled material decreases pollution in the environment. Please recycle packaging where facilities exist. Check with your local council authority for recycling advice.

CONTENTS

- 1 x Wet & Dry Vac
- 1 x Main handle
- 1 x Head handle
- 2 x Wheels
- 2 x Castors (1 braked)
- 2 x Wheel covers
- 2 x Securing split pins for wheels
- 2 x Washers for fitting the wheels
- 1 x Axle
- 2 x Screws for fitting the head handle
- 2 x Suction tube
- 1 x Hose step down adaptor
- 1 x Crevice nozzle
- 1 x Air regulator
- 1 x Dual purpose nozzle
- 3 x Combination nozzle attachment
- 1 x Pleated filter
- 1 x Tank bag
- 1 x Foam filter
- 1 x Suction hose
- 1 x Instruction manual

Distributed by:
Ozito Industries Pty Ltd

AUSTRALIA (Head Office)

1-23 Letcon Drive, Bangholme Victoria, Australia, 3175

Telephone: 1800 069 486

WARRANTY

YOUR WARRANTY FORM SHOULD BE RETAINED BY YOU AT ALL TIMES. IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO YOUR NEAREST BUNNINGS WAREHOUSE (see www.bunnings.com.au or www.bunnings.co.nz for store locations) WITH YOUR BUNNINGS REGISTER RECEIPT. PRIOR TO RETURNING YOUR PRODUCT FOR WARRANTY PLEASE TELEPHONE OUR CUSTOMER SERVICE HELPLINE:

**Australia 1800 069 486
New Zealand 0508 069 486**

TO ENSURE A SPEEDY RESPONSE PLEASE HAVE THE MODEL NUMBER AND DATE OF PURCHASE AVAILABLE. A CUSTOMER SERVICE REPRESENTATIVE WILL TAKE YOUR CALL AND ANSWER ANY QUESTIONS YOU MAY HAVE RELATING TO THE WARRANTY POLICY OR PROCEDURE.

1 YEAR WARRANTY

Your product is guaranteed for a period of **12 months from the original date of purchase**. If a product is defective it will be repaired in accordance with the terms of this warranty. Warranty excludes consumable parts, for example: wheels, bearings.

The benefits provided under this warranty are in addition to other rights and remedies which are available to you under law. The warranty covers manufacturer defects in materials, workmanship and finish under normal use.

Our goods come with guarantees that cannot be excluded under Australian Consumer law & Consumer Guarantees Act 1993 (NZ). You are entitled to a replacement or refund for a major failure and to compensation for other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired and replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

WARRANTY EXCLUSIONS

The following actions will result in the warranty being void.

- If the tool has been operated on a supply voltage other than that specified on the tool.
- If the tool shows signs of damage or defects caused by or resulting from abuse, accidents or alterations.
- Failure to perform maintenance as set out within the instruction manual.
- If the tool is disassembled or tampered with in any way.
- The warranty excludes damage resulting from product misuse or product neglect.

This warranty is given by Ozito Industries Pty Ltd.

ABN: 17 050 731 756

Ph.1800 069 486

Australia/New Zealand (Head Office)
1-23 Letcon Drive, Bangholme, Victoria, Australia 3175