





P = No. of Panels


M = No. of Mid Rails (the horizontal divider within a panel)

If a mid rail is required it will be placed at 600mm from the base. If a second mid rail is required it will be placed midway between the first mid rail and the top of the frame.



EasyAS Shutters can be adjusted up to 20mm horizontally (width) and vertically (height).

## THE LAYOUT OF YOUR SHUTTER WILL BE BASED ON THE FOLLOWING TABLE AND DIMENSIONS OF YOUR WINDOW OPENING

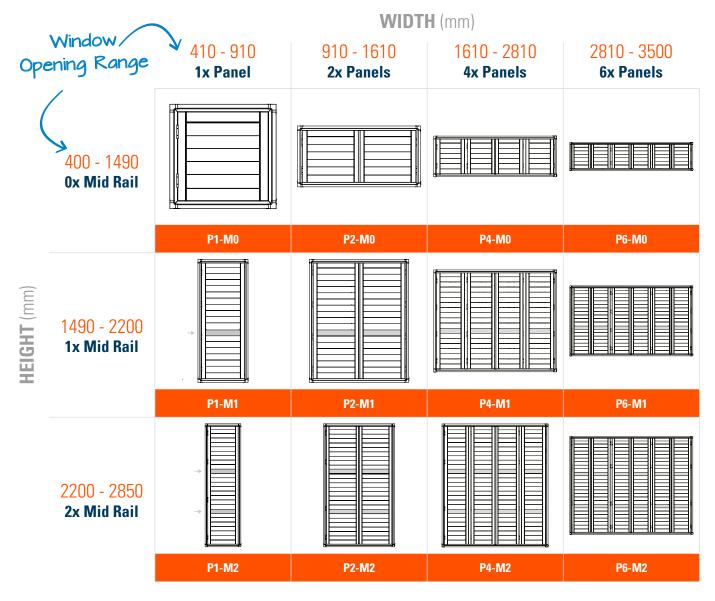





# CUSTOM SIZE ORDER FORM

For assistance in completing this form visit easy-as.com.au

Customer Name:	Mobile:
Email:	
Address:	
State:	Postcode:

## FOLLOW THE & CHECK MEASURE INSTRUCTIONS

N.B - Check that there are no obstacles like locks, window handles, winders or storm bars that will interfere with the shutter.

#### **◆** CONFIGURATION GUIDE

Using your measurements document the sizes for your **EasyAS** Adjustable D.I.Y Shutters in the table below.

CTODE LICE ONLY

				STURE USE UNLY [ 1/N: 000000 ]		
Item	Window Name/Location	<b>Width</b> (mm)	<b>Height</b> (mm)	Custom Configuration	SQM Area (width x height)	Price (\$)
X	Lounge	2000	1500	P4-MI	3m <sup>2</sup>	\$XX.xx
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

### Take this to the Special Orders desk to complete your order

Please note that custom size orders have a lead time of approximately 40 working days.

**DISCLAIMER:** Custom size orders cannot be returned or amended. Please ensure all measurements provided are clear and accurate.