



AQUAPORT®

water for life

3WAY TAP



Installation & Operating Instructions

AQP-TAP-3S
Three Way Tap

AQP-TAP-3G
Three Way Tap



SYSTEM

select



Congratulations on your purchase of the Filtered Water Sink Mixer 3 Way Tap

AQUAPORT SELECT 3 STEP SYSTEM

Aquaport has developed a premium range of tap mixers to suit your home or office décor and budget.

From a simple 1-way lever tap to a premium 4 way Filtered Sink Mixer offering the choice of hot and cold mains water as well as chilled and ambient water from the one tap. Our unique three stage colour select system allows easy and personal selection of the right tap mixer for your home or office needs.

Note: Please read through the instructions carefully before using or installing the product and ensure that the manual is kept in a safe place for future reference.

The faucet must be properly installed and located in accordance with the installation instructions before it is used.

Register your warranty online at www.aquaport/warranty

By registering your warranty online you will be automatically entered into our monthly prize draw.

CUSTOMER HOTLINE: 1300 764 325

Aquaport Corporation Pty Ltd
PO Box 81 Findon SA 5023 Australia
Telephone: 1300 764 325
Facsimile: 08 8354 0722
Email: aquaport@aquaport.com.au
Web: www.aquaport.com.au

Due to manufacturing alterations actual product may vary from that pictured.



WaterMark

License Number:
WMKA21678



WATER QUALITY

Caution: For use with municipal water only.

SAFETY PRECAUTIONS

Warning: It is essential that these Installation and Operating Instructions be strictly observed, for correct operation of this appliance.

We recommend a qualified licensed plumber install the system, who is prepared to guarantee their workmanship.

Prior to installation, check for any existing State or Local Plumbing Codes, to ensure installation is compliant.

Warning: Tapware must never be installed using acetone silicones.

Sink mixer must be installed with an isolating tap in accordance with local authority installation codes.

Wipe tapware in one direction only, applying minimal pressure on mixer.

Use only a soft dry cloth with warm soapy water to clean the surface of mixer. Never use harsh detergents or abrasive cleaners.

To maintain tap lacquer, use a soft cloth or wipe over mixer with warm soapy water to remove surface dust where tapware remains dry.

System Specifications	Maximum:	Minimum:
Working Pressure	1000 kpa	300 kpa
Working Temperature:	80°C	1°C

Note: Recommended working pressure: 300 to 700 kpa

Maximum difference in pressure between hot and cold supply should be 150 kpa.

* Where normal working pressures exceed maximum stated above in the System Specifications, a pressure limiting valve should be installed.

INSTALLATION INSTRUCTIONS


A. Component identification and content check list:

Model AQP-TAP-3S - 3 Way Tap

Ref	Description	Qty
1	Tap Mixer	1
2	Mains Cold Water Connection (Letter C engraved)	1
3	Mains Hot Water Connection (Letter H engraved)	1
4	Filtered Water Shank	1
5	Filtered Water Lever	1
6	Mains Water Hot & Cold Lever	1
7	Aerator (located in outlet)	1

Fittings

8	Flexible Metal Connector	2
9	Brass Adapter Red Washer	1
10	Brass Adapter	1
11	1/4 inch Quick Connection Black O-ring	1
12	1/4 inch Quick Connection Piece	1
13	Mounting set:	
	a. Mixer base with o-ring	
	b. Fixing plate washer	
	c. Fixing plate	
	d. Locking Nut	

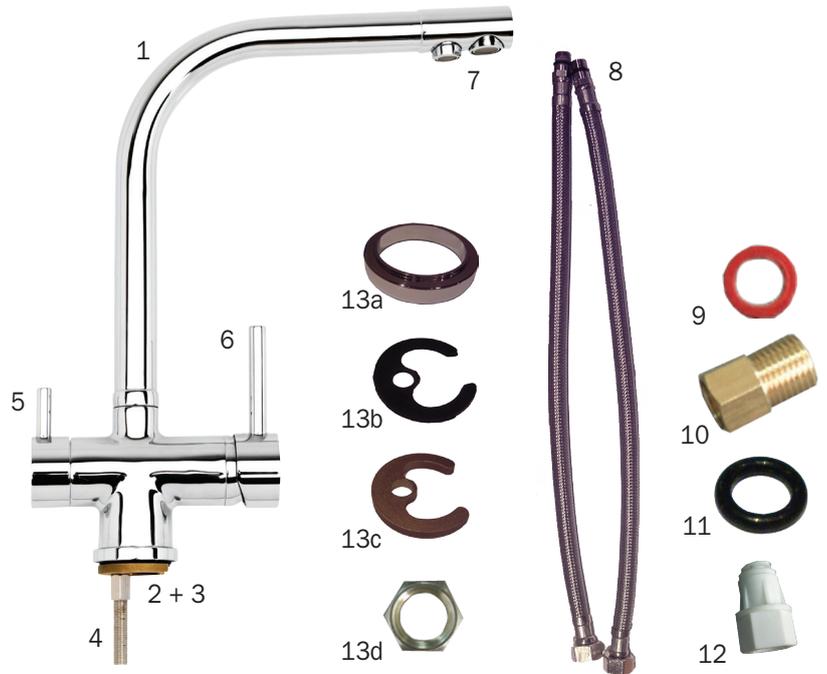

Model AQP-TAP-3G - 3 Way Tap

Ref	Description	Qty
1	Tap Mixer	1
2	Mains Cold Water Connection (Letter C engraved)	1
3	Mains Hot Water Connection (Letter H engraved)	1
4	Filtered Water Shank	1
5	Filtered Water Lever	1
6	Mains Water Hot & Cold Lever	1
7	Aerator (located in outlet)	1

Fittings


8	Flexible Metal Connector	2
9	Brass Adapter Red Washer	1
10	Brass Adapter	1
11	1/4 inch Quick Connection Black O-ring	1
12	1/4 inch Quick Connection Piece	1
13	Mounting set:	
	a. Mixer base with o-ring	
	b. Fixing plate washer	
	c. Fixing plate	
	d. Locking Nut	



B. Typical Installation Diagram


- A. Tap Mixer
- B. Mains Cold Water
- C. Mains Hot Water
- D. Flexible Metal Connectors
- E. Filtered Water Shank
- F. 1/4 inch tubing *
- G. Filtration System *

* Filter System and Tubing sold separately

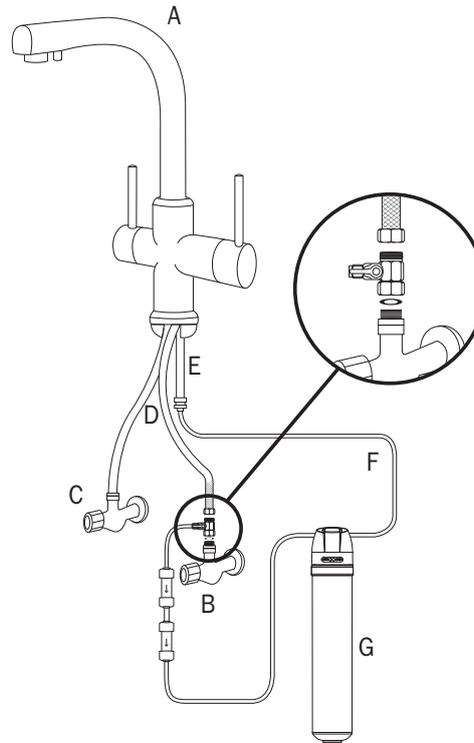

C. Faucet Installation Instructions

Warning: Do not use any tools to fix the flexible metal connectors. Hand tight pressure only.

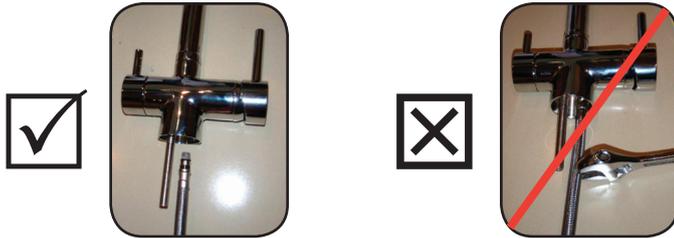

Warning: Do not over tighten the Flexible Metal Connectors to the mixer connections, as cross threading and leaking can occur. Water tightness is not improved and the o-rings can be damaged.

Note: This mixer must be installed with an isolating tap in accordance with local authority installation codes.

1. Shut off mains water supply and drain any excess water from the old tap before removing the tap from the sink.
2. Locate the Mains Cold and Hot Water Connections (2 & 3) inlet on the tap mixer (marked with the letters C and H).
3. Firmly hand tighten the Flexible Metal Connectors (8) into the inlets, being careful not to over tighten and to avoid damage to the o-ring seals.

4. Thread the Flexible Metal Connectors (8) and Filtered Water Shank (4) through the Mixer Base (13a).

Note: Check to make sure the mixer base o-ring is still present and is fully seated in place.

5. Mount the tap mixer onto the sink hole, by threading the Flexible Metal Connectors (8) and Filtered Water Shank (4) through the sink hole. Position the Mixer base (13a) between the sink and the tap mixer.
6. Ensure that the Flexible Metal Connectors (8) is positioned towards the front of the sink with the lever handles pointing towards the user and Filtered Water Shank (4) is positioned at the back.
7. Thread the Fixing Plate Washer (13b) and then the Fixing Plate (13c) onto the Filtered Water Shank (4).
8. Screw Locking Nut (13d) onto the Filtered Water Shank (4) and lock the tap mixer into the sink by tightening the Locking Nut.

Note: Tap mixer levers must never be used to align the tap in centre positions after Locking Nut has been tightened. Damage to levers will occur. Loosen Locking Nut before aligning the tap mixer in the centre of the sink.



9. Place the Brass Adapter Red Washer (9) into the female end of the Brass Adapter (10) and screw Brass Adapter onto the Filtered Water Shank (4).
10. Place the 1/4 inch Quick Connection Piece Black O-ring (11) into the 1/4 inch Quick Connection Piece (12), and Screw 1/4 inch Quick Connection Piece onto the end of the Filtered Water Shank (4).

Note: Hand tighten connections only, as cross threading can occur. If leaks occur, apply sealing tape in a clockwise direction and reconnect fittings. Do not apply sealing tape in a counter clockwise direction, it releases the tape.

11. Locate the Flexible Metal Connector (8) connected to the Mains Cold Water Connection (2) inlet on the tap mixer and connect the Flexible Hose Connector to the mains cold water supply line.
12. Locate the Flexible Metal Connector (8) connected to the Mains Hot Water Connection (3) inlet on the tap mixer and connect the Flexible Hose Connector to the mains hot water **supply line.**

IMPORTANT: Re-check to make sure hot and cold mains water connections are correct.

13. Insert 1/4 inch tubing from your water filtration system onto the 1/4 inch Quick Connection Piece (12).

Note: Refer to section D. Tubing Installation

14. Before turning on mains water supply, open the tap mixer Mains Water Hot & Cold Levers (6) midway between the full hot and full cold and remove the Aerator (7) from the tap mixer outlet.
15. Turn “ON” the mains water supply and thoroughly flush water through the supply lines and the tap mixer.
16. Turn the tap mixer water levers “OFF”, reinstall the Aerator (7) and check for any leaks.

Note: Connections may need to be reinstalled and tightened slightly.

Customer Care Line: 1300 764 325

D. Tubing Installation

The Tap Mixer has been supplied with a quick and easy to install quick connection piece for your filtered water connection.

Note: Check the ends of the tubing to make sure there are no cuts, nicks, flat spots or sharp edges. If any of these are present, cut the ends with a utility knife. We recommend the use of a tube cutter.



To install tubing:

1. Measure the length of 1/4 inch tubing required to run from your filtration system to the 1/4 inch Quick Connection Piece (12) connected to the tap mixer Filtered Water Shank (4).
2. Measure 3/4 inch (19.05mm) from the end of the tubing and mark with a pencil. Fig 3
3. Push the tubing firmly into the 1/4 inch Quick Connection Piece (12), until the pencil mark is pushed next to the collet or until tubing is fully seated. Fig 3. If tubing is removed, recut the end, measure, mark and re-insert.
4. Pull slightly on tubing to ensure tube is secure.

Note: Tubing must be fully inserted/seated to avoid leaks.

To remove tubing: Push collet against the face of the fitting and pull tubing to remove (with collet still held against fitting face).

Fig 4

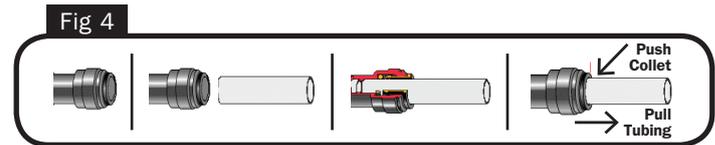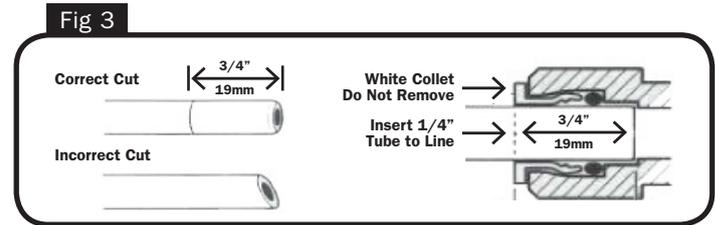

E. Trouble Shooting

BEFORE YOU CALL FOR SERVICE PLEASE REVIEW THE TROUBLE SHOOTING TIPS FIRST.

Problem	Possible Causes	What To Do
Leaking	Incorrect Installation	Check to make sure tubing has been installed correctly. Refer to section D. Tubing Installation.
	Connection needs thread tape	Unscrew the quick fitting connector and place thread tape around the mixer shank in a clockwise direction. Reassemble quick fitting connection and install tube.
	Faulty tap	If tap mixer is leaking at the tap handle please contact Aquaport.
No Water Flow	Shut off valve is switched off	Please make sure that the shut off valve on your filtration system is open.
	Mains water switched off	Make sure that your mains water supply has not been shut off

Warranty Periods

Replacement of products or parts	Full 5 year limited warranty
Replacement of products or parts including labour	Full 12 month limited warranty
Note-jumper Valve	3 months warranty only

Conditions Of Warranty:

1. Warranty covers any defects in material or workmanship in the manufactured product.
2. The warranty extends only to repairing or replacing any component that proves to be defective in material or workmanship.
3. Product must be installed by a licensed plumber, and in accordance to relevant National Standards and State Regulations.

Note: We recommend a qualified licensed plumber install the system, who is prepared to guarantee their workmanship.

4. Product must be fully installed in accordance with the user manual installation instructions.
5. Product must be installed with an isolating tap in accordance with local authority installation codes.
6. Warranty does not cover products which have been exposed to water pressure and or temperatures that exceed the stated limitations as per the product installation instructions.
7. Warranty does not cover defects occasioned by misuse, alterations, accidents, or used for other than the intended purpose.
8. Warranty does not cover damage to the product caused by accident, fire, or floods.

9. Warranty does not cover the fitting of other devices to the outlet of the tapware. EG. Tap water filter.
10. Warranty does not cover the fitting of non-approved in tap body or end of line flow regulating devices.
11. Warranty does not cover damage as a result of obstructions due to inadequate flushing of system before use.
12. Warranty does not cover damages to tapware finishes which arise from the use of adhesives, sealants etc..
13. Warranty does not cover damages to tapware finishes which occur during installation or post installation use.
14. Warranty does not cover failure to clean & replace outlet aerator inserts etc...
15. Warranty does not cover damage or malfunctions of tapware ceramic cartridge due to the presence in the water supply of:
 - a. Copper tube pieces
 - b. Sand, dirt or stones
 - c. Thread tape
 - d. Other objects not normally present on potable water supplies
 - e. Water pressure exceeding 1000kpa.
16. Warranty does not cover products which have been attached via the end of the spout to any additional water control device e.g dishwasher, tap water filter

To Make a Claim:

1. Copy of proof of purchase with date of purchase is required. Please keep purchase receipt in a safe place.
2. Evidence showing that the product has been installed by a licensed plumber in accordance with these installation instructions and relevant National Standards and State Regulations.

For warranty claims please call: 1300 764 325



CUSTOMER HOTLINE: 1300 764 325

Aquaport Corporation Pty Ltd
PO Box 81 Findon SA 5023 Australia
Telephone: 1300 764 325
Facsimile: 08 8354 0722
Email: aquaport@aquaport.com.au
Web: www.aquaport.com.au