


BRING DRAMA AND DETAIL TO YOUR WALLS WITH DURABLE VERTICAL LINED SHEET CLADDING.

Creating a strong visual impact for your building is easier than ever with Scyon™ Axon™ cladding. Fast and easy to install as well as robust and versatile, Axon is the perfect antidote to boring walls. The vertical 9mm wide grooves imitate vertical joint timber boards with a 1200mm wide fibre cement sheet. The grooves complement classic and modern building designs to create stand out facades, and bring texture and interest to outdoor rooms. Axon cladding is on-trend for boxy room extensions and mixed material designs.



Axon Cladding 133mm Grained

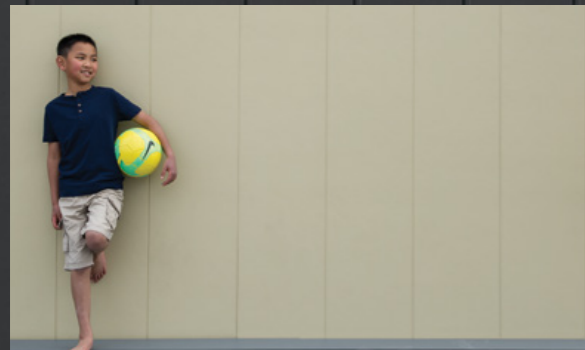

Axon Cladding 400mm Smooth



Axon Cladding 133mm Smooth

Axon™ Cladding Range



Features and Benefits

- The 1200mm wide sheets are available in common wall sizes 2450, 2750 and 3000 mm high to reduce cutting and waste.
- Can be gun nailed to a timber stud frame with 50mm 14 gauge stainless steel brad nails for fast construction (Up to N3 and C1 wind classifications).
- The shiplap on the long edges is hidden. It looks just like the machined grooves.
- Pre-primed to reduce painting costs.
- Install onto timber or light gauge steel frames.
- Sheets can be run horizontally for designer diversity. Call James Hardie for guidance on 131103.
- For bushfire prone areas: the Axon Cladding BAL Rating is up to BAL 40.
- Resists damage from shrinking, swelling, cracking, rot, moisture and termites when installed and maintained correctly.
- Made in Australia for Australian conditions.
- Read the installation manual before commencing work for more details on flashing, framing, fixing, details, warranties, warnings and safe work practices.

Range

Axon Cladding 133mm Smooth

A smooth texture sheet with 9mm vertical grooves, spaced 133mm apart.

Axon Cladding 133mm Grained

A wood grained texture sheet with 9mm vertical grooves, spaced 133mm apart.


Axon Cladding 400mm Smooth

A smooth texture sheet with 9mm vertical grooves, spaced 400mm apart.

Sizes

Product code	Surface Texture	Groove Spacing (mm)	Length (mm)	Width (mm)	Thickness (mm)	Mass (kg/m ²)
403931	Smooth	133	2,450	1,200	9	12.5
404417	Smooth	400	2,450	1,200	9	12.5
403932	Smooth	133	2,750	1,200	9	12.5
404418	Smooth	400	2,750	1,200	9	12.5
403933	Smooth	133	3,000	1,200	9	12.5

Axon™ installation

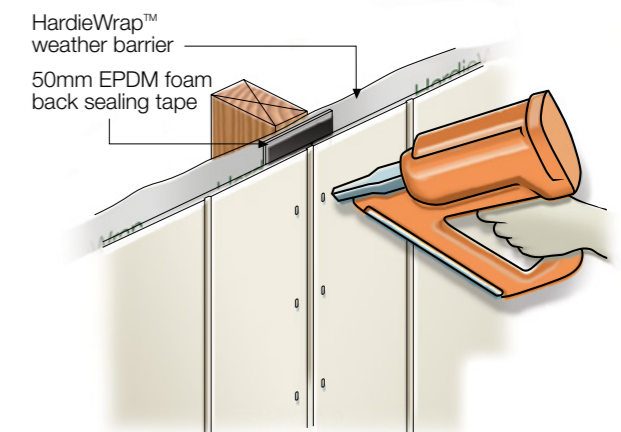

ADDITIONAL PRODUCT INFORMATION

Go to the Axon Cladding page at jameshardie.com.au for:

- Installation Guide
- Warranty
- Safety information including Safety Data Sheet, warnings and safe work practices.

Product code	Surface Texture	Groove Spacing (mm)	Length (mm)	Width (mm)	Thickness (mm)	Mass (kg/m ²)
404419	Smooth	400	3,000	1,200	9	12.5
404510	Grained	133	2,450	1,200	9	12.5
404511	Grained	133	2,750	1,200	9	12.5
404512	Grained	133	3,000	1,200	9	12.5

Selling units per pack: 30 sheets

Accessories

Accessories	Code	Illustration	Accessories	Code	Illustration
James Hardie™ 9mm Aluminium External Corner	305521		James Hardie™ 9mm Aluminium Horizontal h Jointer	305614	
James Hardie™ 9mm Aluminium Internal Corner	305520		James Hardie™ 50mm wide Foam Back Sealing Tape	304560	
James Hardie™ Aluminium Snap On Corner (2 pieces per set)	305513		HardieBlade™ Saw Blade 185mm	300660	
James Hardie™ 9mm Aluminium Horizontal h Flashing 3,000mm long	305613		HardieBlade™ Saw Blade 254mm	303375	

© James Hardie Australia Pty Ltd ABN 12 084 635 558 2016. ™ and ® denote trademarks and registered trademarks owned by James Hardie Technology Ltd.