

Adjustable D.I.Y Shutter



EASY D.I.Y INTERNAL
PLANTATION SHUTTER

EASY^oAS
ADJUSTABLE D.I.Y SHUTTER

Available at
BUNNINGS
warehouse

Take This Brochure to the Special Orders Desk to place an order

EASY^oAS

ADJUSTABLE **D.I.Y** SHUTTER



EASY D.I.Y INTERNAL PLANTATION SHUTTER

Created by an industry leader known for quality and unsurpassed product innovation, EasyAS is proud to present the world's first Adjustable D.I.Y Shutter range.



Call **1800 805 018**

Visit **easy-as.com.au**

OWN BEAUTIFUL INTERNAL SHUTTERS TODAY

Owning beautiful shutters in your home has never been easier with the **EasyAS Adjustable D.I.Y Shutter** range.

AS EASY AS 1, 2, 3



STEP 1 MEASURE

EasyAS Check Measure
Inside Window Frame (Reveal Fit) only.



STEP 2 ORDER

Find your shutter size within the adjustable range using the *EasyAS Shutter Selection Guide*. Simply fill out the form (inside back page) and visit Bunnings Special Orders desk to place your order.




STEP 3 INSTALL

Once your shutters arrive at Bunnings, take your **EasyAS Adjustable D.I.Y Shutter** home, unpack and install.



Colour/Finish



Blade Size



Adjustable Range



PVC

Material

MADE FROM QUALITY PVC

DURABLE, TRUSTED QUALITY

EasyAS Internal Plantation Shutters are made from high quality PVC with water resistant properties – great for bathrooms and kitchens, also reinforced with an Aluminium core adding to their durability.

CHECK MEASURE


INSIDE WINDOW FRAME (REVEAL FIT) ONLY

Measure the inside of your window(s) frame across the width, height & depth as below.

STEP 1

Measure window inside width


Record the smallest measurement of the 3 (eg. Top, Middle or Bottom)

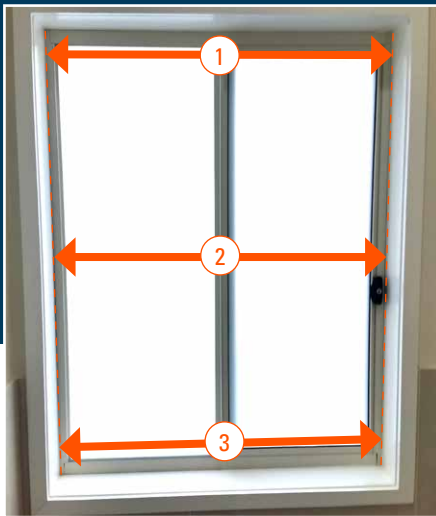

STEP 2


Measure window inside height

Record the smallest measurement of the 3 (eg. Left, Centre or Right)

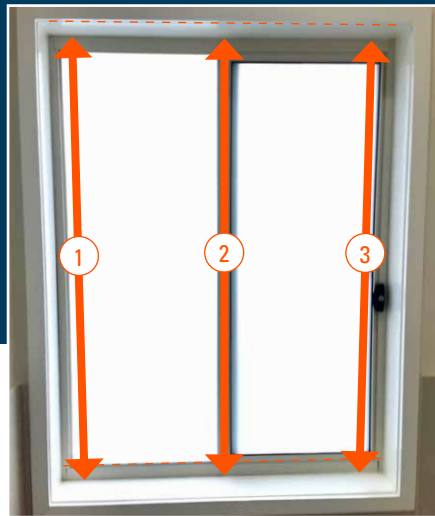


STEP 3

Measure window frame depth

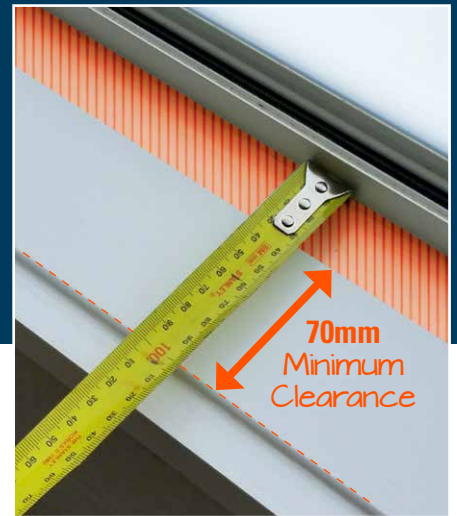


NOTE: there needs to be **70mm depth minimum of complete clearance** from any obstacles, from the window frame edge.

Obstacles to look for: Mullions, Locks, Window Handles, Winders, Storm Bars etc




























EXAMPLE Lock Handle



EXAMPLE Storm Bars

STANDARD SIZES
✓ SELECTION GUIDE
INSIDE WINDOW FRAME (REVEAL FIT) ONLY

		WIDTH (mm)				
		610 (600-620)	910 (900-920)	1210 (1200-1220)	1510 (1500-1520)	1810 (1800-1820)
D R O P / H E I G H T (mm)	Adjustable Range 600 (590-610)	 I/N: 0022381 A	 I/N: 0022387 F	 I/N: 0022393 K	 I/N: 0022398 P	 I/N: 0022403 U
	900 (890-910)	 I/N: 0022382 B	 I/N: 0022388 G	 I/N: 0022394 L	 I/N: 0022399 Q	 I/N: 0022404 V
	1200 (1190-1210)	 I/N: 0022384 C	 I/N: 0022389 H	 I/N: 0022395 M	 I/N: 0022400 R	 I/N: 0022405 W
	1500 (1490-1510)	 I/N: 0022385 D	 I/N: 0022390 I	 I/N: 0022396 N	 I/N: 0022401 S	 I/N: 0022407 X
	1800 (1790-1810)	 I/N: 0022386 E	 I/N: 0022392 J	 I/N: 0022397 O	 I/N: 0022402 T	 I/N: 0022408 Y

INSTALL GUIDE


STEP 1

Lay out the frame, corners and panels in front of the window




STEP 2

Assemble outer frame by sliding corner wedges together, then clipping on corner covers

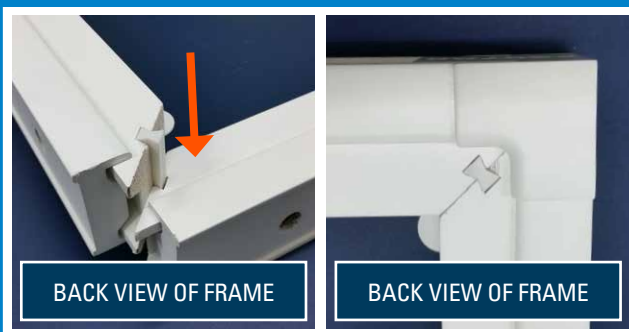

STEP 3

Place frame into window/reveal and adjust evenly - expand turning anticlockwise. Secure with 1 screw on each side

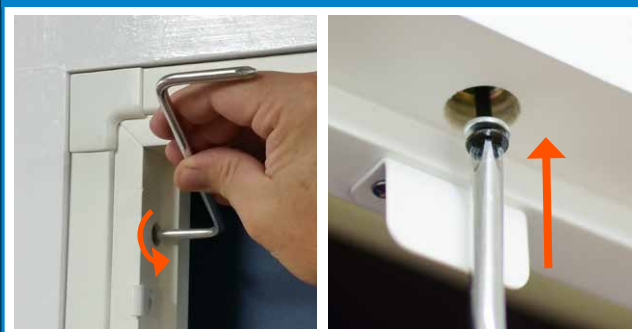

STEP 4

Insert panel(s) and secure with Hinge Pins. Check for smooth opening & closing



STEP 5

Using the remaining screws, secure into window jamb. Place white tabs over holes



TOOLS INCLUDED

- Multi Tool - Screwdriver & Allen Key

OPTIONAL TOOLS IF REQUIRED

Not Included / Sold Separately

- Cordless Drill
- 2mm Drill Bit

Check out the **INSTALL VIDEO** at
easy-as.com.au

USE THIS AREA TO PLAN YOUR SHUTTERS

FOLLOW THE  CHECK MEASURE INSTRUCTIONS

N.B - Check that there are no obstacles like locks, window handles, winders or storm bars that will interfere with the shutter.

INSIDE WINDOW FRAME (REVEAL FIT) ONLY

Using your measurements and the  **SELECTION GUIDE** you can easily select your **EasyAS Adjustable D.I.Y Shutter** and document them in the table below.

WINDOW DETAILS

Item	Window Name/Location	Width (mm)	Height (mm)	Clearance Depth (Minimum 70mm)	Item Number (I/N)
X	Main Bathroom	910	1200	76	0022389
1					
2					
3					
4					
5					
6					

Take this to the Special Orders desk to complete your order

How It Works

It's as simple as 1,2,3! Follow the steps shown to purchase or order your product. If you need further advice, speak to a Team Member at the Special Orders Desk in-store.

1. Select The Product You Want

View the extensive range available in this brochure or online. Use the item number shown below to order your product.



2. Order At The Special Orders Desk

After you have selected the product you want, take this brochure to the Special Orders Desk.

3. Collect Your Order

Upon placing your order, your product will arrive in 7-14 working days.

Ask us about Additional Services



I/N: 0028821

