




2 PCS

HÄFELE

**SALICE 45° ANGLE**

Full Overlay - Clip On





(k)



## Adjusting the Door



### Depth adjustment of door with SALICE mounting plates.

With the SALICE mounting plates with quick fixing system, a depth adjustment of the door from  $-0.5$  mm up to  $+2.8$  mm is possible via eccentric. It is not necessary to loosen further screws.





### Height adjustment of door with SALICE cruciform mounting plates with slot.

Height adjustment of door of  $\pm 2$  mm is possible by loosening the two fixing screws. The slots allow the mounting plates to slide in both directions. Afterwards the screws must be re-tightened.



### Lateral adjustment of door with SALICE concealed hinges.

The adjusting screw produces the lateral travel of the hinge arm from  $-1.5$  mm up to  $+4.5$  mm. This value is reduced to  $-0.5$  mm when using profile door hinges and mini hinges. The door moves with respect to the furniture side without coming apart. There are no further correcting actions required.







# HÄFELE

## Drilling Instructions




Hinge Cup (Door)

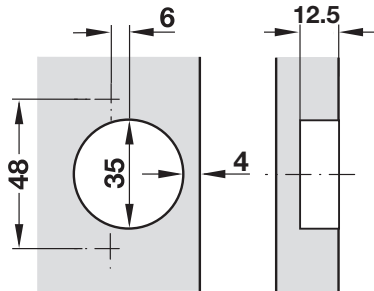


## Mounting Instructions



Mount Plate (Cabinet Side)

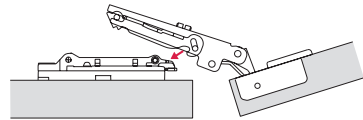



Join the two points marked by an arrow.

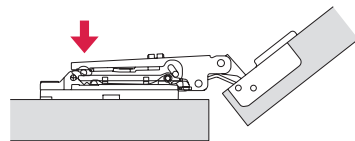

Apply light pressure.




# HÄFELE

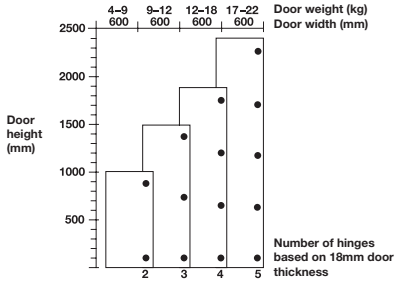

### Screw fixing

Cup fixed with screws (countersunk head).



Salice Hinge Drilling Pattern

### Tools Required:

- > 35mm Ø Drill Bit & Template Kit
- > 2mm Ø Drill Bit
- > Pencil
- > Power Drill
- > No 2 Pozidrive Screwdriver / Screw Bit

**MADE IN ITALY**



**HÄFELE AUSTRALIA PTY. LTD**  
ARTICLE # 483.02.415

8 MONTEREY RD DANDENONG VIC 3175  
730.83.627