


# Certified Premium Round Tanks



All tanks are certified to the RAINWATER TANK STANDARD AS/NZS4766:2006 LICENCE NO. SMKP 21429



Colour Range Pg. 10-11  
Slimline Range Pg. 12-13  
Delivery & Installation Pg.55

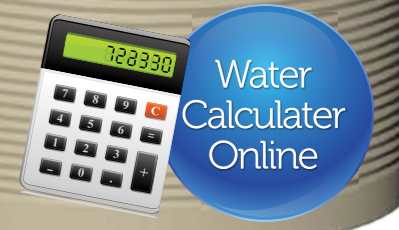

\* T&C APPLY

## ROUND TANK STANDARD FITTINGS



## ROUND TANK BENEFITS

Polymaster's certified range of round rainwater tanks are manufactured with strength in mind. Here's what makes them so strong:

- **Self-supporting roof** design means no support poles are necessary
- **Extra thick corrugated** or smooth walls for maximum strength
- **One-piece construction** means there are no joins, seams or part-lines
- **Specially formulated double strength UV+ resin** on the complete colour range ensures ultimate protection against the sun
- **Certification to AS/NZ4766** tank standard which allows local rebates to be claimed



1 Moulded lugs for easy lifting and tie-down points.



2 Mosquito proof leaf screen.



3 90 mm Overflow fitting.



4 Solid brass threaded Outlet with an approved Ball Valve.

## ROUND RAINWATER TANK SPECIFICATIONS

CODE	LITRES/GALLONS	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	STRAINER	OVERFLOW	OUTLET
RWT200	200 (45 gal)	.60m (1'11")	.90m (2'11")	.90m (2'11")	centre	12.00	6.00
RWT600	600 (132 gal)	1.00m (3'3")	.95m (3'1")	.95m (3'1")	centre	12.00	6.00
RWT1000	1,000 (220 gal)	1.00m (3'3")	1.50m (4'11")	1.50m (4'11")	centre	12.00	6.00
RWT1600	1,600 (350 gal)	1.25m (4'1")	1.61m (5'3")	1.50m (4'11")	12.00	11.00/4.00	6.00
RWT2270T	2,270 tall (500 gal)	1.30m (4'3")	2.00m (6'6")	1.92m (6'4")	12.00	11.00/5.00	6.00
RWT2270LP	2,270 low profile (500 gal)	1.70m (5'8")	1.31m (4'3")	1.20m (3'11")	12.00	11.00/4.00	6.00
RWT3300	3,300 (730 gal)	1.52m (5')	2.10m (6'10")	2.00m (6'6")	12.00	11.00/4.00	6.00
RWT4500T	4,500 tall (1,000 gal)	1.70m (5'8")	2.20m (7'3")	2.10m (6'10")	12.00	11.00/4.00	6.00
RWT4500LP	4,500 low profile (1,000 gal)	2.15m (7'2")	1.58m (5'2")	1.38m (4'6")	12.00	11.00/3.00/7.00	6.00
RWT5000	5,000 (1,100 gal)	1.95m (6'5")	2.17m (7'2")	1.96m (6'5")	12.00	11.00/3.00/7.00	6.00
RWT7100	7,100 (1,560 gal)	2.15m (7'2")	2.30m (7'5")	2.12m (7')	12.00	11.00/3.00/7.00	6.00
RWT9000	9,000 (2,000 gal)	2.50m (8'2")	2.26m (7'5")	2.05m (6'9")	12.00	11.30/2.30/5.30/8.30	6.00
RWT13600	13,600 (3,000 gal)	3.10m (10'2")	2.45m (8')	2.10m (6'11")	12.00	11.00/2.00/5.00/8.00	4.00
RWT22500	22,500 (5,000 gal)	3.56m (11'8")	2.8m (9'2")	2.47m (8'1")	12.00	11.30/2.30/5.30/8.30	4.00
RWT31700	31,700 (7,000 gal)	4.10m (13'5")	3.04m (9'11")	2.61m (8'7")	12.00	11.30/2.30/5.30/8.30	4.00
RWT50KL	50,000 (11,000 gal)	4.60m (15'1")	3.44m (11'03")	3.29m (10'10")	12.00/6.00	2:00/4:00/6:00/8:00/10:00/12:00	6.00

### FOR PRICES CONTACT YOUR POLYMASTER DISTRIBUTOR.

All measurements are approximate due to variable shrinkage during manufacture. Due to pigment variations with raw material manufacturers, colour shades may vary. Smaller rainwater tanks need regular maintenance if drinking quality is to be maintained. Polymaster takes no responsibility for the quality of water held in a tank. \*Free delivery only applies to some regions and tank sizes. Contact us for details.