

SANIPACK

SA 99

Designed for discreet wall hung toilet installations. Featuring a depth of only 146mm the SANIPACK fits easily inside a wall cavity.



POSSIBLE CONNECTIONS
Wall hung WC, vanity basin, shower;

VERTICAL PUMPING HEIGHT
Up to 5m

HORIZONTAL PUMPING DISTANCE
Up to 100m (refer to pumping graph below)

RECOMMENDED DISCHARGE PIPE DIAMETER
20mm uPVC Pressure Pipe

NORMAL OPERATING TEMPERATURE
35°C

ELECTRICAL POWER SUPPLY
220-240V / 50Hz

MOTOR POWER RATING
400W


OVERALL MEASUREMENTS (W x H x D)
401 x 295 x 146mm

ACCESSORIES

- Factory pre mounted non return valve (supplied)
- Can be equipped with SaniAlarm (sold separately) (Isolation valve not supplied)

All horizontal pipework requires a minimum of 1:100 fall

FLOW RATE PERFORMANCE

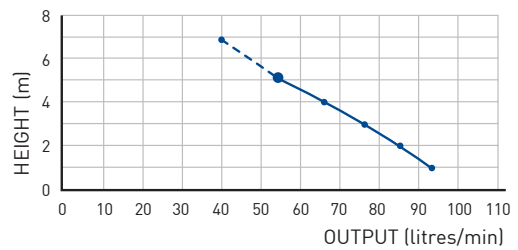

PUMPING DISTANCE PERFORMANCE

Increase size of horizontal run by one pipe size after 5m

