

# TONGUE AND GROOVE CEMENT FLOORING FOR TILED BALCONIES AND DECKS. UP TO 40% FASTER TO INSTALL\*.



For enduring construction fibre cement is preferred to particle board and plywood for exterior sub floors and suspended floors. But installing compressed fibre cement can be back-breaking. Moving sheets that can weigh over a hundred kilos is hazardous. Then pre-drilling and screw-fixing them is time-consuming. And adding trimmers to ensure every edge is supported creates extra work.

Thankfully, Scyon™ Secura™ Exterior Flooring sheets weigh less than 45 kilos and installing them is easier and up to 40% faster compared with compressed fibre cement.




## Secura™ Exterior Flooring




### Features and Benefits

- Up to 40% faster to install than compressed fibre cement flooring.
- Gun nail with corrosion resistant D Head or 2.8 x 50mm fibre cement nails.
- Tongue and groove joints on long edges remove the need for supporting trimmers.
- Sealed on all sides for additional moisture resistance.
- A top coat that assists tile adhesion.
- Mesh reinforcement on the underside for extra strength and impact resistance.
- Resists damage from shrinking, swelling, cracking, rot, moisture and termites when installed and maintained correctly.
- For balconies not over habitable rooms no additional waterproofing membrane is needed. Though a priming coat is recommended.
- Made in Australia for Australian conditions.
- Read the installation guide before commencing work, and for more information on flashing, framing, fixing, details, warranties, warnings and safe work practices.

Scyon™ Secura™ Exterior Flooring

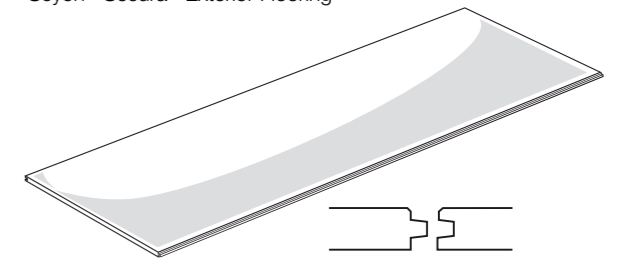

Scyon™ Secura™ Exterior fastener layout

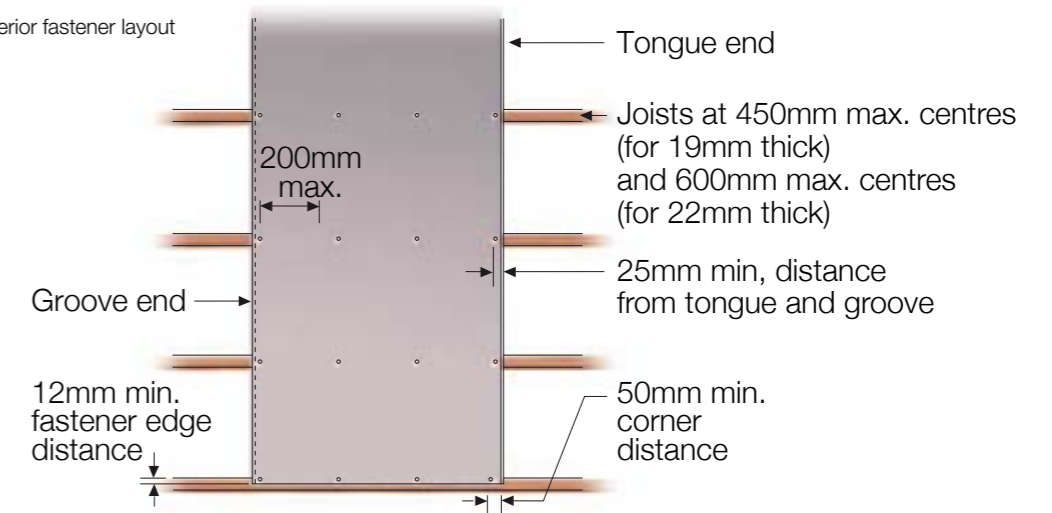

### Sizes

Product code	Length (mm)	Width (mm)	Thickness (mm)	Joint Centres (mm)	Mass (kg/m²)	Edge Colour
404050	2,700	600	19	450	24.5	Light Blue
404689	2,400	600	22	600	28.3	Dark Blue

### ADDITIONAL PRODUCT INFORMATION

Go to the Secura Exterior Flooring page at [jameshardie.com.au](http://jameshardie.com.au) for:

- Installation Guide
- Warranty
- Safety information including Safety Data Sheet, warnings and safe work practices.

### Accessories

Accessories	Code	Illustration	Accessories	Code	Illustration
HardieBlade™ Saw Blade 185mm	300660		James Hardie™ Joint Sealant* 300ml cartridge	305534	
HardieBlade™ Saw Blade 254mm	303375		James Hardie™ Joint Sealant* 600ml sausage	305672	

\*Up to 40% faster to install than compressed fibre cement flooring.  
© James Hardie Australia Pty Ltd ABN 12 084 635 558 2016. ™ and © denote trademarks and registered trademarks owned by James Hardie Technology Ltd.