
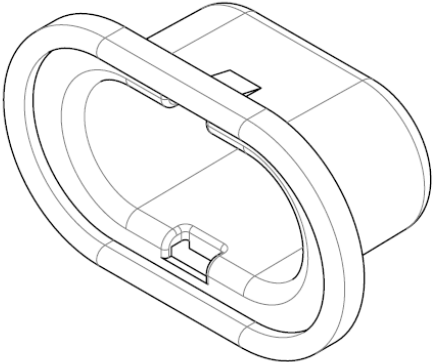



Parts List

AD05526	Grommet	
---------	---------	---

Remove the Grommet

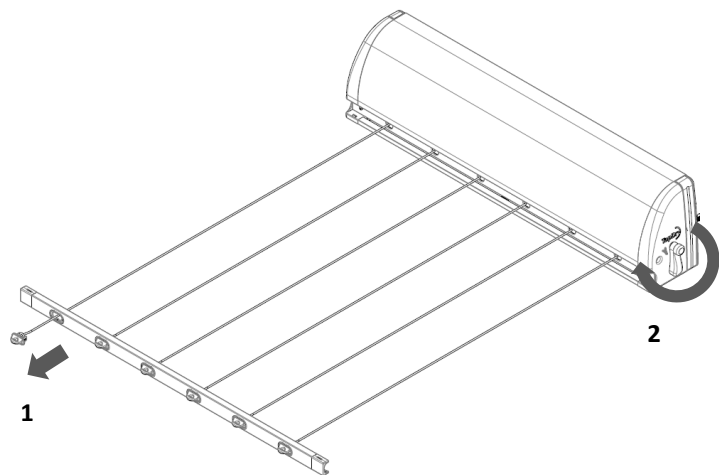


1. Pull out the Front Bar at least 1 metre and pull out the line with the grommet to be changed an additional 100mm.
2. Lock the line tensioner

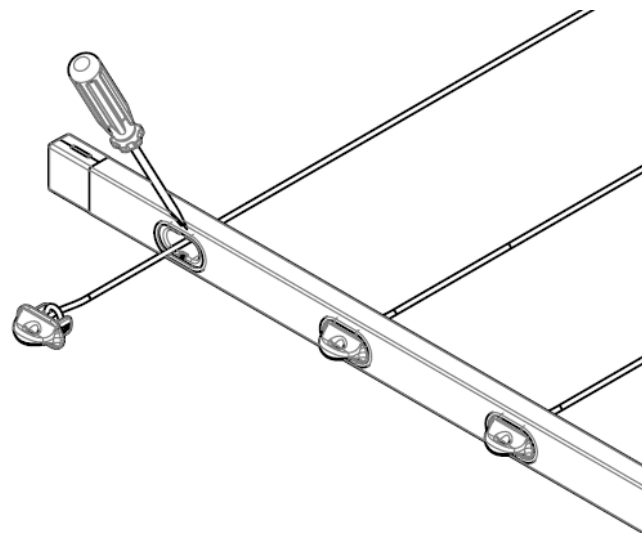


3. Use a flat bladed screw driver to carefully pry the grommet out of the Front Bar. Take care to not scratch the powdercoated finish.
4. Untie the line from the Line Hook and thread the grommet of the line.


Fit the new Grommet

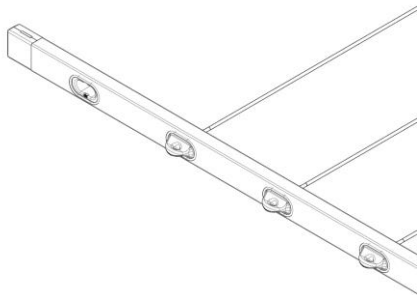


1. Clip the new Grommet into the Front Bar

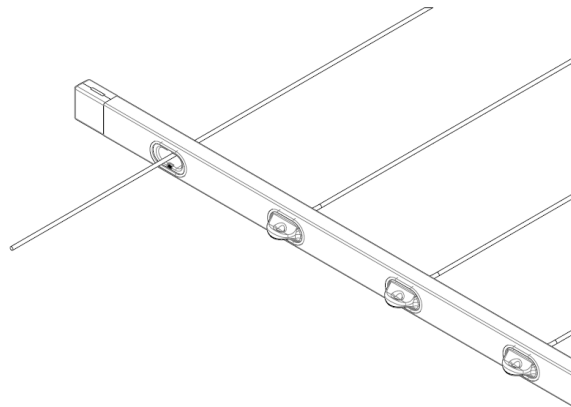


2. Thread the line through the Grommet

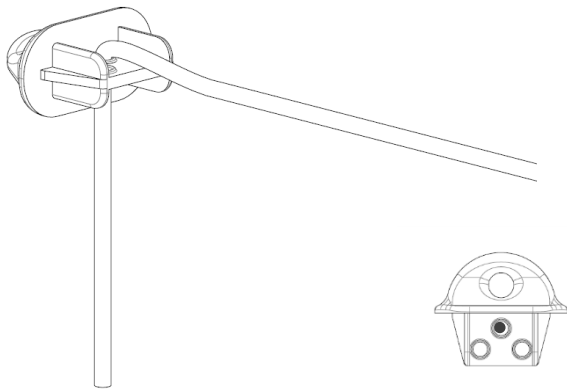


3. Thread the line down through the Line Hook

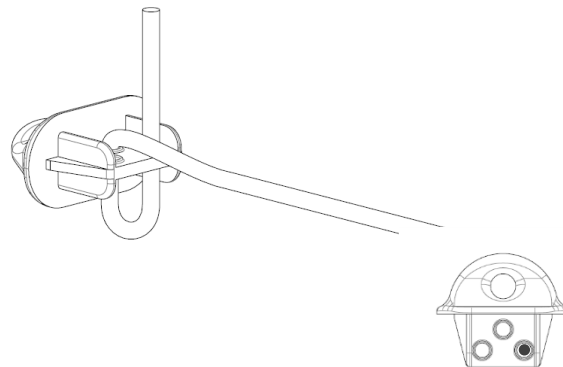

4. Loop the line up through the Line Hook

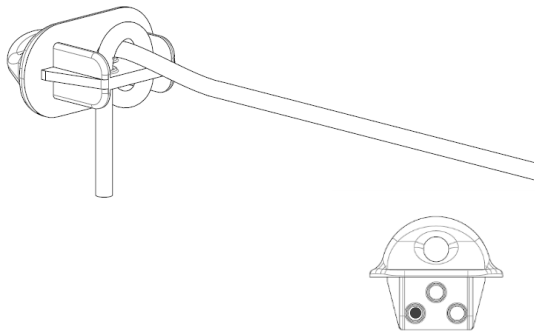

5. Loop the the line over and down

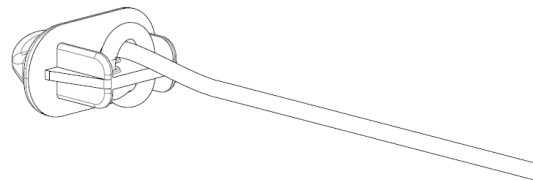

6. Insert the end of the line in the loop fromed in step 4 and tighten