

Adjustable D.I.Y Shutter



EASY D.I.Y INTERNAL
PLANTATION SHUTTER

EASY^oAS
ADJUSTABLE D.I.Y SHUTTER

Available at
BUNNINGS
warehouse

Take This Brochure to the Special Orders Desk to place an order

EASY•AS

ADJUSTABLE **D.I.Y** SHUTTER



EASY D.I.Y INTERNAL PLANTATION SHUTTER

Created by an industry leader known for quality and unsurpassed product innovation, EASY•AS is proud to present the world's first Adjustable D.I.Y Shutter range.



Call **1800 805 018**

Visit **easy-as.com.au**

OWN BEAUTIFUL INTERNAL SHUTTERS TODAY

Owning beautiful shutters in your home has never been easier with the **EASY•AS** Adjustable D.I.Y Shutter range.

AS EASY•AS 1, 2, 3



STEP 1 MEASURE

EASY•AS Check Measure
Inside Window Frame (Reveal Fit) only.



STEP 2 ORDER

Find your shutter size within the adjustable range using the *EASY•AS Shutter Selection Guide*. Simply fill out the form (inside back page) and visit Bunnings Special Orders desk to place your order.




STEP 3 INSTALL

Once your shutters arrive at Bunnings, take your **EASY•AS** Adjustable D.I.Y Shutter home, unpack and install.



White

Colour/Finish



Blade Size



Adjustable Range



CHECK MEASURE

INSIDE WINDOW FRAME (REVEAL FIT) ONLY
Measure the inside of your window(s) frame across the width, height & depth as below.

STEP 1

Measure window inside width




STEP 2

Measure window inside height




STEP 3


Measure window frame depth

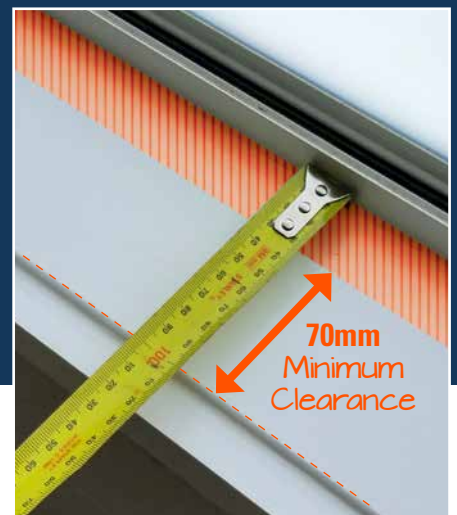

NOTE: there needs to be **70mm depth minimum of complete clearance** from any obstacles, from the window frame edge.
Obstacles to look for: Mullions, Locks, Window Handles, Winders, Storm Bars etc



EXAMPLE Lock Handle




























EXAMPLE Storm Bars

✓ SELECTION GUIDE

INSIDE WINDOW FRAME (REVEAL FIT) ONLY

Adjustable Range
600 (590-610)

WIDTH (mm)

	610 (600-620)	910 (900-920)	1210 (1200-1220)	1510 (1500-1520)	1810 (1800-1820)
					
	Model Number: 610600 A I/N: 0022381	Model Number: 910600 F I/N: 0022387	Model Number: 1210600 K I/N: 0022393	Model Number: 1510600 P I/N: 0022398	Model Number: 1810600 U I/N: 0022403
900 (890-910)					
	Model Number: 610900 B I/N: 0022382	Model Number: 910900 G I/N: 0022388	Model Number: 1210900 L I/N: 0022394	Model Number: 1510900 Q I/N: 0022399	Model Number: 1810900 V I/N: 0022404
1200 (1190-1210)					
	Model Number: 6101200 C I/N: 0022384	Model Number: 9101200 H I/N: 0022389	Model Number: 12101200 M I/N: 0022395	Model Number: 15101200 R I/N: 0022400	Model Number: 18101200 W I/N: 0022405
1500 (1490-1510)					
	Model Number: 6101500 D I/N: 0022385	Model Number: 9101500 I I/N: 0022390	Model Number: 12101500 N I/N: 0022396	Model Number: 15101500 S I/N: 0022401	Model Number: 18101500 X I/N: 0022407
1800 (1790-1810)					
	Model Number: 6101800 E I/N: 0022386	Model Number: 9101800 J I/N: 0022392	Model Number: 12101800 O I/N: 0022397	Model Number: 15101800 T I/N: 0022402	Model Number: 18101800 Y I/N: 0022408

DROP / HEIGHT (mm)

INSTALL GUIDE

STEP 1

Lay out the frame, corners and panels in front of the window




STEP 2

Assemble outer frame by sliding corner wedges together, then clipping on corner covers



STEP 3

Place frame into window/reveal and adjust evenly - expand turning anticlockwise. Secure with 1 screw on each side

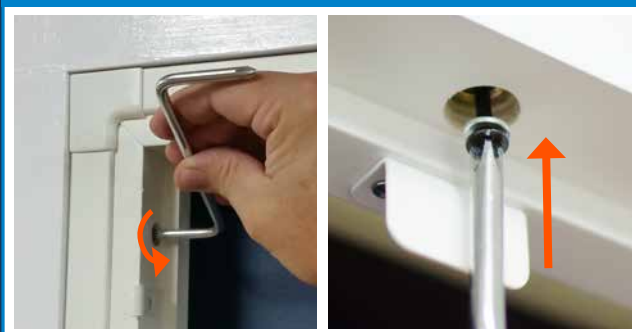

STEP 4

Insert panel(s) and secure with Hinge Pins. Check for smooth opening & closing



STEP 5

Using the remaining screws, secure into window jamb. Place white tabs over holes



TOOLS INCLUDED

- Multi Tool - Screwdriver & Allen Key

OPTIONAL TOOLS IF REQUIRED

Not Included / Sold Separately

- Cordless Drill
- 2mm Drill Bit

Check out the **INSTALL VIDEO** at
easy-as.com.au

USE THIS AREA TO PLAN YOUR SHUTTERS

FOLLOW THE CHECK MEASURE INSTRUCTIONS

N.B - Check that there are no obstacles like locks, window handles, winders or storm bars that will interfere with the shutter.

Using your measurements and the  **SELECTION GUIDE** you can easily select your **EASY•AS** Adjustable D.I.Y Shutter and document them in the table below.

WINDOW DETAILS

Item	Window Name/Location	Width (mm)	Height (mm)	Clearance Depth (Minimum 70mm)	Item Number (I/N)
X	Main Bathroom	910	1200	76	0022389
1					
2					
3					
4					
5					
6					

Take this to the Special Orders desk to complete your order

How It Works

It's as simple as 1,2,3! Follow the steps shown to purchase or order your product. If you need further advice, speak to a Team Member at the Special Orders Desk in-store.

1. Select The Product You Want

View the extensive range available in this brochure or online. Use the item number shown below to order your product.



2. Order At The Special Orders Desk

After you have selected the product you want, take this brochure to the Special Orders Desk.

3. Collect Your Order


Upon placing your order, your product will arrive in 7-14 working days.

Ask us about Additional Services



**WE WILL
DELIVER**

I/N: 9931030



1090199999994