



RHEEM CONTINUOUS FLOW



GAS



6 STAR

2 - 6

PEOPLE

16,20 OR
26 L/MIN

DELIVERY

10
YEAR

HEAT
EXCHANGER
WARRANTY¹

Rheem Continuous Flow guarantees you hot water that never runs out, with quality and performance to also give you peace of mind.

Both 50°C and 60°C models:

- 50°C models provide the added safety of a fully-tempered home at 50°C (without the cost of a tempering valve)²
- Remote Temperature Controller options for added convenience and safety
- Digital display for easy fault diagnosis and service
- 10 Year Heat Exchanger Warranty¹
- 50°C models – adjustable to deliver 50°C at the nearest tap.
- 60°C models for hot water to the kitchen and laundry – where 50°C is often not hot enough²
- **Flamesafe®** overheat protection – shuts down the heater before overheating can occur
- **Rheem Q Factor** – hot water every time, without fluctuation when multiple taps demand hot water
- Technical support via Rheem's National Service Network
- Natural Gas or Propane
- Frost protected down to -20°C




COMES ON STEADY, HOT AND STRONG

INSTALL A







RHEEM CONTINUOUS FLOW

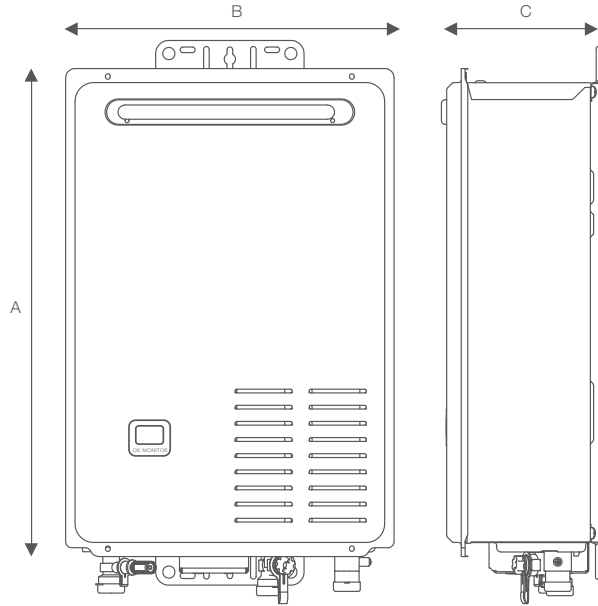

SPECIFICATION	Rheem metro	Rheem 20	Rheem metro max
Model Number	876E16 874E16	876620 874620	875E26 871E26
Pre-set Temperature °C	50 60	50 60	50 60
Number of Bathrooms	1 – 1.5	1.5 – 2	2 – 3
Gas Type	Natural Gas/ Propane	Natural Gas/ Propane	Natural Gas/ Propane
Gas Energy Rating	Stars 6	6	6
Flow Rate @ 25°C Rise	L/min 16	20	26
Min. Operating Flow Rate	L/min 2.7	2.7	2.7
Nominal Gas Consumption	MJ/hr 126	153	199
Dimensions			
Height A	mm 520	520	565
Width B	mm 350	350	350
Depth C	mm 163	163	205
Depth – from wall to Hot Water Outlet	mm 51	51	127
Depth – from wall to Cold Water Inlet	mm 43	43	53
Depth – from wall to Gas Inlet	mm 45	45	103
Weight (empty)	kg 16	16	21
Max. Water Supply Pressure	kPa 1000	1000	1000
Min. Water Supply Pressure	kPa 140	140 </td <td>140</td>	140
Cold Water Connection	R ¾	R ¾	R ¾
Hot Water Connection	R ¾	R ¾	R ¾
Gas Connection	R ¾	R ¾	R ¾



¹ Continuous Flow Warranty Conditions:
10 Years parts and 3 Years labour on Heat Exchanger, 3 Years parts & labour on other components, when installed in a domestic dwelling. For all other installations, the warranty period is 1 Year parts and labour on Heat Exchanger and other components. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty.

² 60°C and higher temperature models and some applications require a tempering valve in accordance with AS 3500.4.

Materials and data are subject to change without notice.

* Registered Trademark of Rheem Australia Pty Ltd.

™ Trademark of SAI Global.



Rheem Australia Pty Ltd.
1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508, Silverwater, New South Wales 2128, Australia.

