Rainwater System
CMS EB3A2

- Automatic mains water bypass system
- Uses rainwater when available
- Uses mains water when no rainwater
- Connect to toilets, washing machine & outside taps
- Single storey home
- Designed in Italy

FL-0029283

AcquaSaver

3 YEAR WARRANTY

ClayTech Pumps COMPLIES TO AUSTRALIAN ELECTRICAL STANDARDS

ClayTech Pumps APPROVED FOR DRINKING WATER AS/NZS 4020

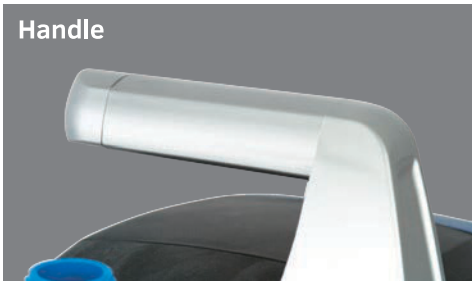

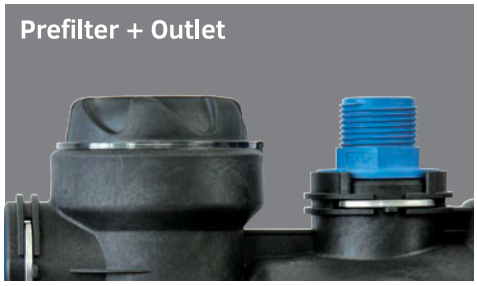

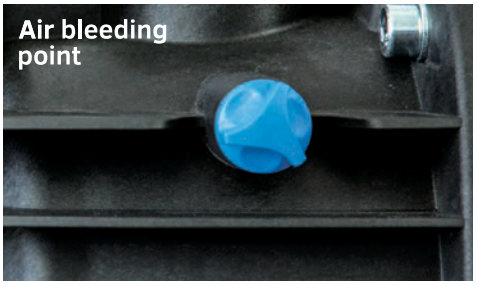

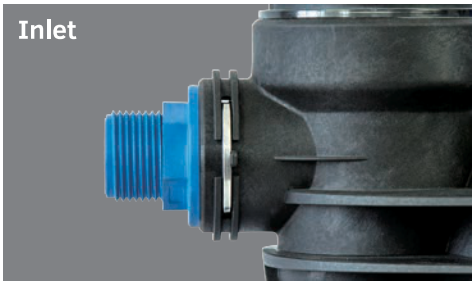

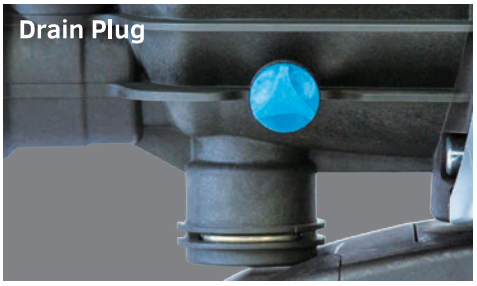

	Model	CMS EB3A2
Electrical data	P2 Pump consumption [W]	400
	Voltage [V]	1 ~ 220-240 AC
	Frequency [Hz]	50
	Current [A]	3.1
	Capacitor nF	12.5
	Capacitor Vc	450
Hydraulic data	Flow rate max. [l/h]	3.000
	Max. Pressure [Bar]	3.9
	Max. Head [m]	39
	Max. working pressure [bar]	6
	Max. suction depth [m]	8m/<3min
Range of use/materials	Length of Power Cable [m]	1.5
	Cable	H07 RNF
	Pump International protection	IP X4
	Insulation Class	F
	Liquid range Temperature [°C]	0 °C / +35 °C
	Max. Ambient Temperature [°C]	+40 °C
Dimensions / weight	L x W x H [mm]	500 x 230 x 520
	Ldm [mm]	312
	Hda [mm]	208
	Wam [mm]	103
	Box Dimensions l x w x h [cm]	54x26x37.5
	Net/Gross Weight [kg]	8.64 / 10.84
	Quantity for pallet [no.]	12

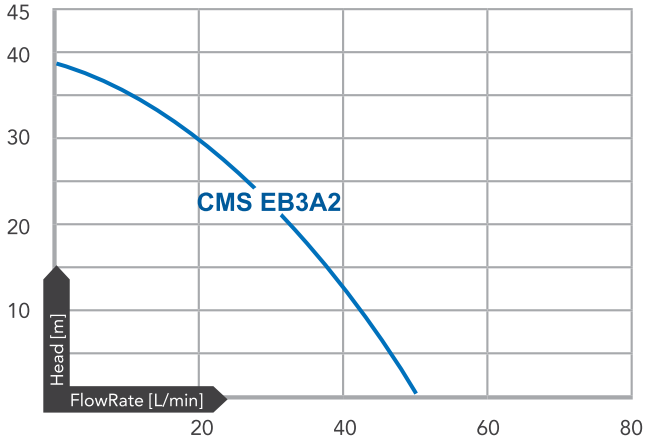

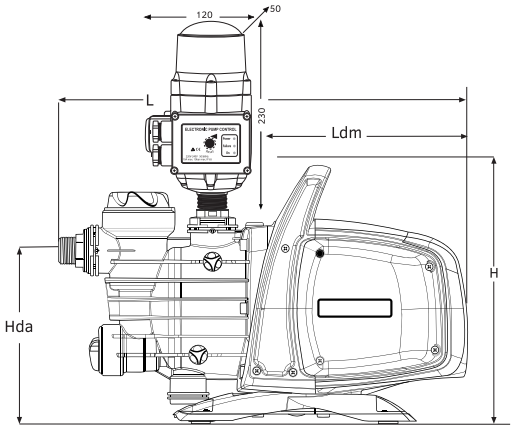



AcquaSaver

Max mains pressure 500Kpa
Max pump Pressure 600 Kpa
Max flow rate 50 Lpm
Pump inlet 25mm 1"BSP F
Mains water inlet 20mm ¾"BSP F
Outlet 20mm ¾" BSP F
Weight 0.85Kg

WaterMark
ATS 5200.477
WMK 60075
AGA

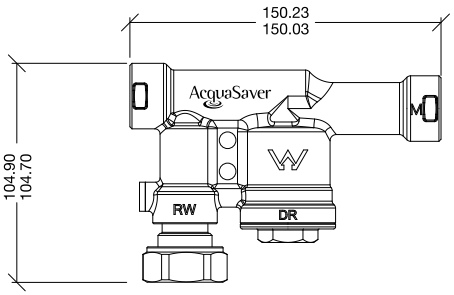

For more information contact: Clayton Engineering **1300 798 022**
or Email **sales@claytonengineering.com.au**