

PairCoil

PRE-INSULATED
ANNEALED
COPPER
PAIRCOIL



USAGE

- Split system air conditioners
- All sizes suitable for R410A refrigerant
- Condensation prevention

STANDARD PAIRCOIL

**With a tough exterior surface
for easy installation.**

- Backed by MM Kembla's reputation for quality, service and customer care for 100 years.
- Easy installation. No glue, tape or messy powder.
- 20m rolls of pre-insulated copper paircoils allows you to install your pipework in less than half the time of conventional methods.
- UV protection.
- Resistance to abrasion and wear and tear.
- Can be pushed through tight spaces without being caught or torn.

PairCoil

PHYSICAL DIMENSIONS

Kembla product code	Copper tube outside diameter x wall thickness (mm)	Copper tube outside diameter (inches)	R-Values	Paircoil length (m)	Total pack weight (kg)	Carton dimensions (cm)	Cartons per pallet
G99515	6.35 x 0.81 - 9.52 x 0.81	1/4 - 3/8	0.2	20	8.19	59 x 18 x 61	24
G99525	6.35 x 0.81 - 12.70 x 0.81	1/4 - 1/2	0.2	20	9.92	65 x 18 x 67	24
G99535	6.35 x 0.81 - 15.88 x 1.02	1/4 - 5/8	0.2	20	13.37	73 x 18 x 75	8
G99555	9.52 x 0.81 - 15.88 x 1.02	3/8 - 5/8	0.2	20	15.12	77 x 23 x 79	6
G99565	9.52 x 0.81 - 19.05 x 1.14	3/8 - 3/4	0.2	20	18.30	80 x 23 x 82	6

COPPER TUBE SAFEWORKING PRESSURE (kPa)

Copper Tube Dimensions Metric (mm)	SWP (kPa)		
	@50°C	@65°C	@75°C
6.35 x 0.81	10,635	9,545	8,820
9.52 x 0.81	6,800	6,105	5,640
12.70 x 0.81	4,995	4,480	4,140
15.88 x 1.02	5,030	4,515	4,170
19.05 x 1.14	4,697	4,181	3,895

INSULATION PROPERTIES

Material	Highly flexible paired, cross linked, closed cell polyethylene
Thermal Conductivity	0.037 W/m.K at 20°C
Tensile Strength	34.2 (3.49)min N/cm ² (kgf/cm ²)
Water Absorption	0.0076 max g/100cm ²
Thickness Shrinkage (%)	5% max @(120 ± 5°C)
Coefficient of moisture permeability	10 (0.005) max (per 25mm in thickness) ng/m ² •s•Pa (g/m ² •h•mmHg)
Working Temperature	Up to 120°C

BCA COMPLIANCE

Pipe Insulation


Meets the requirements of insulation material in accordance with AS/NZS 4859.1.

The requirements for Insulation on pipes as outlined in Specification J5-2(d) (BCA Vol 1) and Part 3.12.5 (BCA Vol 2). The BCA requires only total material R-Values be used. For R-Values greater than R1.1 contact our customer service centre to discuss your specific project requirements.

Copper

Manufactured to AS/NZS1571. Recommended maximum operating temperature is 65°C and in accordance with AS1677. A/C manufacturer's operating and installation instructions should be consulted.

DEW POINT GRAPH

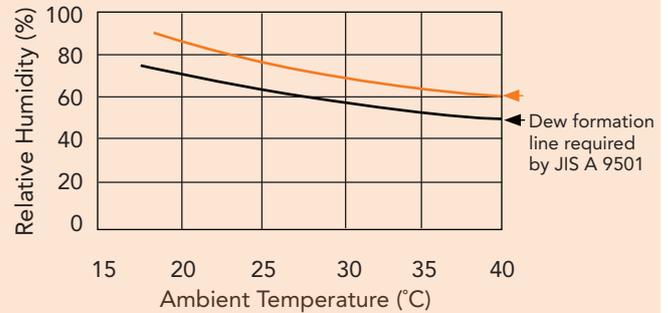

INSTALLATION

- Kembla PairCoil copper tube is recommended to be flare jointed. If brazing is necessary, all safety precautions should apply. Refer to installation instruction included with each Kembla PairCoil carton.
- If tight bending is required, the insulation can be cut back to accommodate a tube bender. Alternatively a length of polyethylene tube can be inserted to prevent kinking.

CAUTION: Product data, design details, performance figures, advice and other information given herein (the "Information") is provided only as a guide to available information. MM Kembla does not accept any liability whatsoever (including arising from negligence) for the accuracy of the Information and for injuries, expense or loss, which may arise as a result of the use of the Information by the recipient.