

TONGUE AND GROOVE FIBRE CEMENT FLOORING FOR TILED BATHROOMS AND LIVING AREAS. UP TO 40% FASTER TO INSTALL*.



Traditional compressed fibre cement flooring provides security against rot and moisture damage in wet areas. It's solid under foot and squeak-free in dry areas. But installing compressed fibre cement can be back-breaking. Moving sheets that can weigh over a hundred kilos is hazardous. Then pre-drilling and screw-fixing them is time-consuming. And adding trimmers to ensure every edge is supported creates extra work.

Scyon™ Secura™ Interior Flooring sheets weigh less than 45 kilos. Installing them is easier and up to 40% faster than compressed fibre cement. The boards have one side for tiling and another side for carpet, vinyl or laminate flooring.

Secura™ Interior Flooring




Features and Benefits

- Up to 40% faster to install than compressed fibre cement flooring.
- Gun nail with corrosion resistant D Head or 2.8 x 50mm fibre cement nails.
- Tongue and groove joints on long edges so the joints don't have to be supported by trimmers.
- Sealed on all sides for additional moisture resistance.
- A top coat that assists tile adhesion.
- Resistant to damage from rain and moisture during construction for up to 3 months.
- Will continue to perform and resist moisture damage if water proofing fails in bathroom applications.
- The tile side has a slight rebate for joint sealant at the tongue and groove joint.
- A strong squeak-free feel under foot in living areas.
- Tiles, vinyl, carpet and laminate flooring can be fixed without the need for an underlay sheet.
- Resists damage from shrinking, swelling, cracking, rot, moisture and termites when installed and maintained correctly.
- For areas outside enclosed showers no additional waterproofing membrane is needed.
- Made in Australia for Australian conditions.
- Read the installation guide before commencing work, and for more information on flashing, framing, fixing, details, warranties, warnings and safe work practices.



Scyon™ Secura™ Interior fastener layout

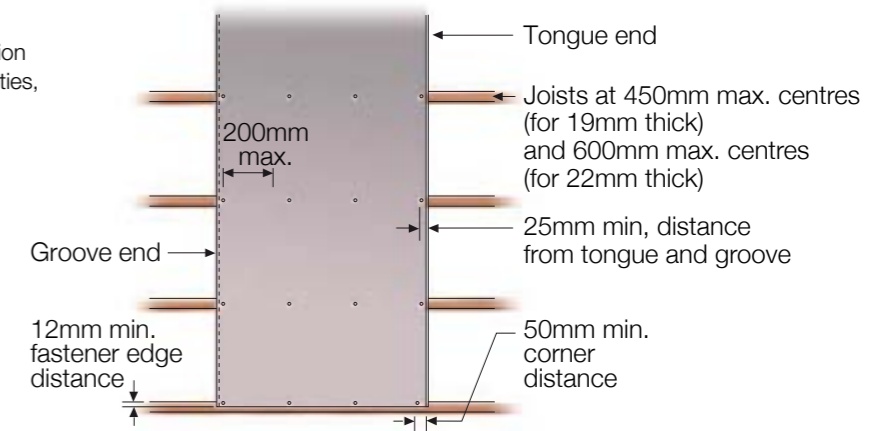

Sizes

Product code	Length (mm)	Width (mm)	Thickness (mm)	Joint Centres (mm)	Mass (kg/m ²)	Edge Colour
404173	2,700	600	19	450	24.5	Clear
403550	1,800	900	19	450	24.5	Clear
404691	2,400	600	22	600	28.3	Dark Grey

ADDITIONAL PRODUCT INFORMATION

Go to the Secura Interior Flooring page at jameshardie.com.au for:

- Installation Guide
- Warranty
- Safety information including Safety Data Sheet, warnings and safe work practices.

Accessories

Accessories	Code	Illustration	Accessories	Code	Illustration
HardieBlade™ Saw Blade 185mm	300660		James Hardie™ Joint Sealant* 300ml cartridge	305534	
HardieBlade™ Saw Blade 254mm	303375		James Hardie™ Joint Sealant* 600ml sausage	305672	

*Up to 40% faster to install than compressed fibre cement flooring.
© James Hardie Australia Pty Ltd ABN 12 084 635 558 2016. ™ and ® denote trademarks and registered trademarks owned by James Hardie Technology Ltd.