

TONGUE AND GROOVE CEMENT FLOORING FOR TILED BALCONIES AND DECKS. UP TO 40% FASTER TO INSTALL*.



For enduring construction fibre cement is preferred to particle board and plywood for exterior sub floors and suspended floors. But installing compressed fibre cement can be back-breaking. Moving sheets that can weigh over a hundred kilos is hazardous. Then pre-drilling and screw-fixing them is time-consuming. And adding trimmers to ensure every edge is supported creates extra work.

Thankfully, Scyon™ Secura™ exterior sheets weigh less than 45 kilos and installing them is easier and up to 40% faster compared with compressed fibre cement.




Secura™ Exterior Flooring




Features and Benefits

- Up to 40% faster to install than compressed fibre cement flooring.
- Gun nail with corrosion resistant D Head or 2.8 x 50mm fibre cement nails.
- Tongue and groove joints on long edges remove the need for supporting trimmers.
- Sealed on all sides for additional moisture resistance.
- A top coat that assists tile adhesion.
- Mesh reinforcement on the underside for extra strength and impact resistance.
- Resists damage from shrinking, swelling, cracking, rot, moisture and termites when installed and maintained correctly.
- For balconies not over habitable rooms no additional waterproofing membrane is needed. Though a priming coat is recommended.
- Made in Australia for Australian conditions.
- Read the installation guide before commencing work for more details on flashing, framing, fixing, details, warranties, warnings and safe work practices.

Scyon™ Secura™ exterior flooring

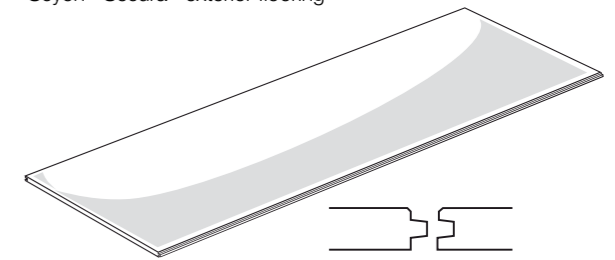

Scyon™ Secura™ exterior fastener layout

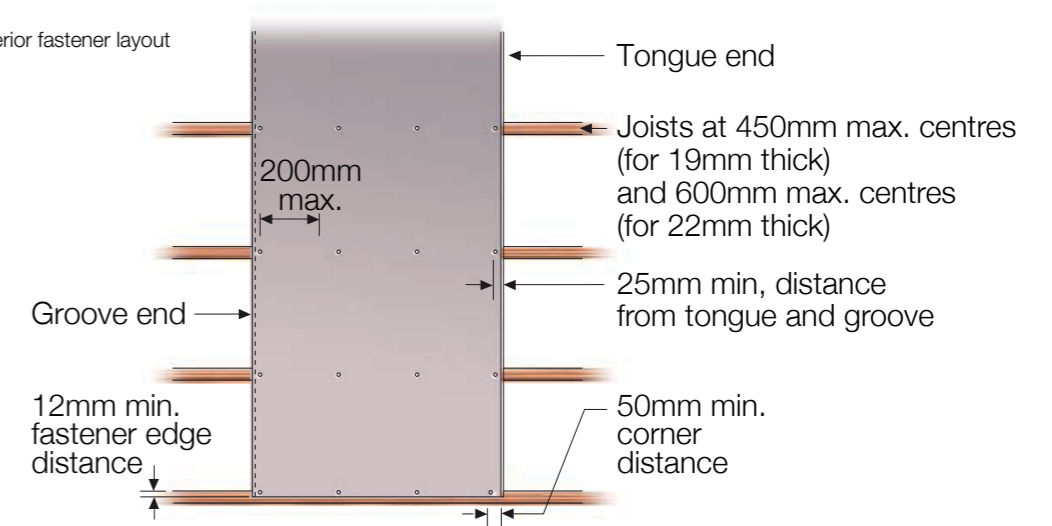

Sizes

Product code	Length (mm)	Width (mm)	Thickness (mm)	Joint Centres (mm)	Mass (kg/m²)	Edge Colour
404050	2,700	600	19	450	24.5	Light Blue
404689	2,400	600	22	600	28.3	Dark Blue

ADDITIONAL PRODUCT INFORMATION

Go to the Secura Exterior Flooring page at jameshardie.com.au for:

- Installation Guide
- Warranty
- Safety information including Safety Data Sheet, warnings and safe work practices.

Accessories

Accessories	Code	Illustration	Accessories	Code	Illustration
HardieBlade™ Saw Blade 185mm	300660		James Hardie™ Joint Sealant* 300ml cartridge	305534	
HardieBlade™ Saw Blade 254mm	300075		James Hardie™ Joint Sealant* 600ml sausage	305672	

*Up to 40% faster to install than compressed fibre cement flooring.
© James Hardie Australia Pty Ltd ABN 12 084 635 558 2016. ™ and © denote trademarks and registered trademarks owned by James Hardie Technology Ltd.