




**HIGH PERFORMANCE DOUBLE SIDED TAPE**

**Product Code: DSFT-3850 | I/N: 0811320**


ametalin™ Double Sided Fixing Tape is a high performance 0.150 mm double sided tape coated with an aggressive acrylic adhesive. Specifically designed to complement our BRANE® VHP wall wrap range, ametalin™ Double Sided Fixing Tape provides a vapour sealing and heat resistant bond that is well suited to low surface energy construction materials, such as steel stud framing.

**Construction**

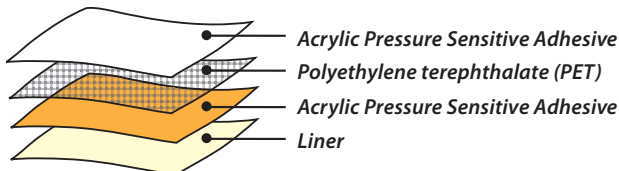

**Features and Benefits**

- ✓ Hand tearable
- ✓ Bonds to a wide variety of metals, timber, and low surface energy materials
- ✓ High peel strength, shear and tack
- ✓ Excellent UV and temperature resistance
- ✓ Conforms well to irregular surfaces

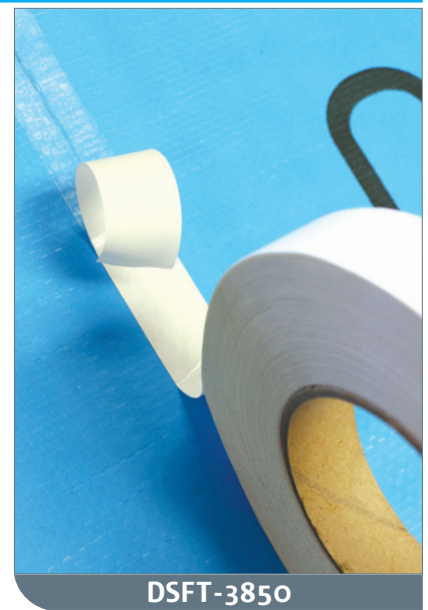

**DSFT-3850**

TEST	TYPICAL VALUE	TYPICAL VALUE (Metric)	TEST METHOD
PRODUCT THICKNESS	6.0 mils	150 µm	PSTC-133/ASTM D 3652
ADHESION TO STEEL	72 oz/in	20 N/25 mm	PSTC-101/ASTM D 3330
ADHESION TO LINER	1.8 oz/in	0.5 N/25 mm	PSTC-101/ASTM D 3330
MINIMUM APPLICATION TEMPERATURE	-22°F	-30°C	
MAXIMUM CONTINUOUS TEMPERATURE	+250°F	+121°C	

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Ametalin recommends that the purchaser test for fitness of use in all applications. Application surface must be clean, dry and free of oil and other contaminants. Apply pressure with plastic squeegee, ensuring that all contours are followed.

**Product Configurations**

ametalin™ Double Sided Fixing Tape is available in: 38 mm x 50 m

**Tape Application**

1. Ensure surfaces to be adhered to are clean, dry and free from oil and other contaminants.
2. Start with a vertical strip of Ametalin Double Sided Fixing Tape and attach to steel stud from top plate to bottom plate, ensuring it is in middle of stud.
3. Apply leading edge of sarking or wall wrap to this strip and roll out a short distance.
4. Immediately apply two anchor screws or staples – one to the upper and one to the lower corner in case of wind gusts.
5. Continue to apply Ametalin Double Sided Fixing Tape along the wall at every second stud and also around windows.
6. Peel off liner from tape, roll out sarking or wall wrap and apply to the double sided tape.
7. Press down firmly with a squeegee and continue along the rest of the wall.
8. Ensure ends of runs are secured, especially in high wind areas.
9. Store tape in a clean, dry place out of direct sunlight.

© 2018 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended purpose. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. DTE-43313-24

**AUSTRALIAN DESIGNED, AUSTRALIAN OWNED.**

**AMETALIN**

9 -11 Playford Crescent Salisbury North SA 5108

T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@ametalin.com W: ametalin.com

**Manufacturers of building membranes | insulation products | flexible packaging**

