


# Sun Haven®


## Heavy Duty PVC Café Blind

### Instructions

Heavy Duty PVC Blinds can be attached either on the face of a structure (Diagram A) or under a structure by tilting the headrail (Diagram B).

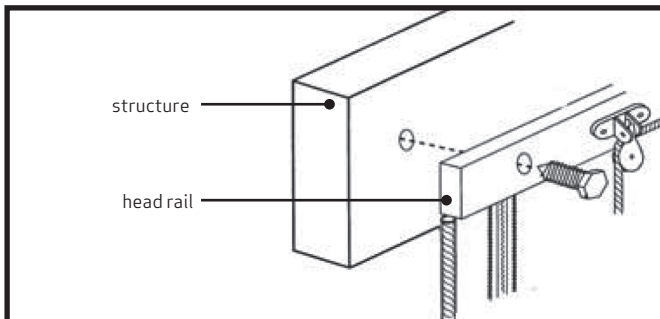

**Diagram A.** Align headrail onto face of structure & mark where hole positions need to be located.

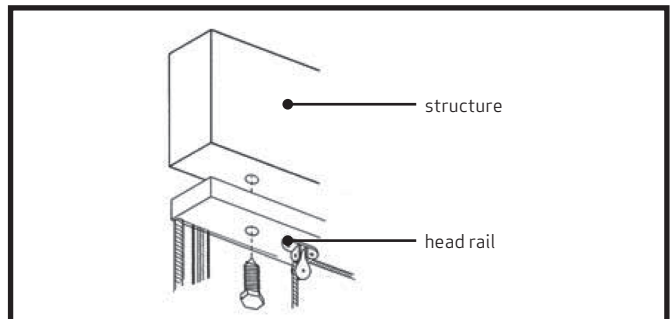


**Diagram B.** Align headrail under structure & mark where hole positions need to be located.

### Fitting Your Blind


1. Always ensure blinds are fitted to a solid, secure structure. Eg. rafters, cross beams or brick. To install your blind, measure & pre-drill pilot holes in structure at identical spacings to the blind head rail. Ensure measurements are level (Diagram C).
2. Align pre-drilled holes with holes in head rail & secure with bolt screws provided (suitable for timber frames) or appropriate fastening systems (ie. masonry bolts).
3. Attach cord cleats to wall at a height over 160cm from ground level.

**Handy hint:** Use nails to temporarily attach blind to structure through outer bolt holes. This will support the blind's weight while securing bolt screws through inner holes.

Give blind adequate time to settle before trimming base flap (if required). Ensuring line is level, mark base flap & cut using a sharp blade or scissors.

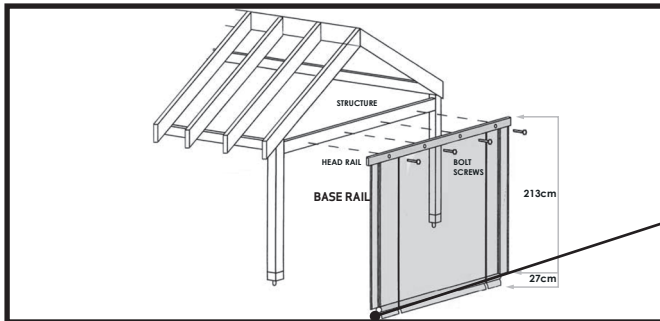

**Diagram C.**

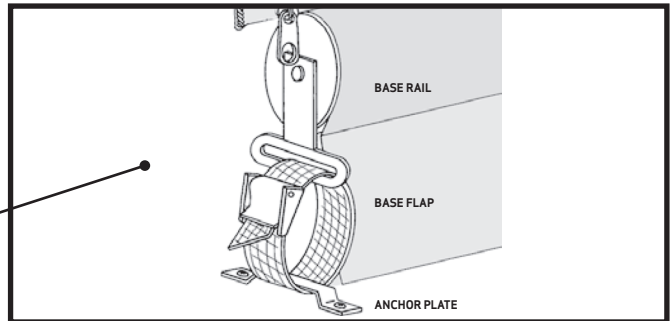

**Diagram D.** Anchor plate can be used for additional support to secure blind in light breezes.




**Note:** Total blind drop is 240cm from the top of the head rail to the bottom of the blind including base rail & base flap.

### Maintenance

For best clarity and to prolong durability, simply clean blinds regularly with warm water and a mild detergent.

### Wall anchor

Increase your blinds protection against wind and rain with wall anchors, creating a stronger seal along the sides of your blind (purchased separately).

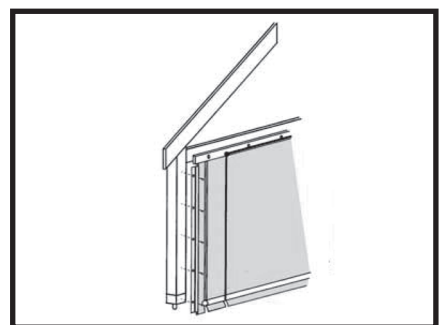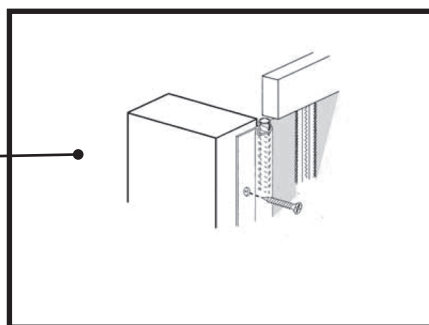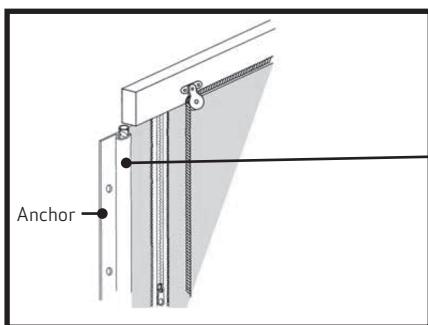

### Fitting your wall anchor

1. After your blind is installed, slide wall anchor channel over the roped blind edge.
2. Align anchor & secure using appropriate screws into structure at 300mm intervals.
3. Pull blind taut & repeat step 3.
4. To roll up blind, simply un-zip sides & pull up using lift cords.

### ⚠ WARNING

WARNING: Young children have died by wrapping loose curtain and blind cords or chains around their necks. Secure cords or chains with cord guides or keep them out of reach by winding them around a cleat. Move cots and furniture away from window covering cords or chains. Do not remove this label.

WARNING: Looped cords, looped bead chains or other flexible looped devices may cause a strangulation hazard for children under 5 years. KEEP CORDS AND CHAINS OUT OF REACH OF CHILDREN.

WARNING: To avoid creating a possible strangulation hazard for children, the window covering must be installed in such a way that a loose cord cannot form a loop 220mm or longer at a height of less than 1600mm above the floor.

The PVC used in this product can expand and contract as blinds are rolled tightly in packaging. Once blind is hung, please allow time for material to relax and fall into its natural position.

**WARNING: Blinds must be rolled up in high winds.**

SunHaven 1.5 x 2.4m  
Cafe Blind: 487959



7 99870 48795 9