

# BRSR60X

## Slide-out Rangehood - Front Recirculated or Ducted

**BLANCO**



**Model Code**  
BRSR60X

**Description**  
60cm, Slide Out Rangehood - Front Recirculated or Ducted

### Features

### Benefits

3 speed motor

Offers a variety of fan speed to suit the type of cooking.

425m<sup>3</sup>/hr air movement

Helps to protect kitchen surfaces such as walls and cabinets from grime and build up.

Can be ducted or front re-circulated

Flexible installation for most kitchens in most kitchen designs.


1 x carbon filter, 1 x aluminium filter and metal grid fitted

Conveniently included as a standard feature. Carbon filters are essential when using front recirculation to extract odours and grease.

1 x 28W halogen light

Halogen bulbs emit very bright white light to provide greater visibility when cooking.  
More efficient than incandescent bulbs and will last longer.

### Specifications

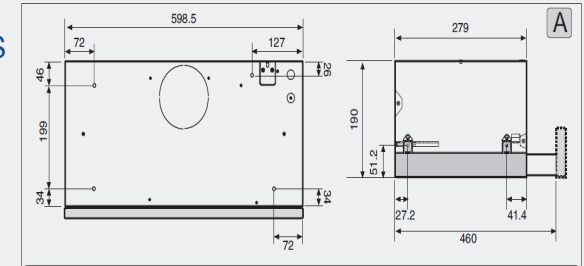

Method of Installation:	Built into overhead cupboards
Overall Dimensions:	190H x 598.5W x 299D (mm)
Power Requirement:	240V – 10 Amps
Airflow:	425m <sup>3</sup> /h
Fan:	3 Speed
Integrated Slide:	Extends 181mm
Ducting:	Top Only
Duct Spigot:	120mm
Noise Level at high:	60 dB
Filters:	Carbon Filter fitted as standard for re-circulating installation – please remove if rangehood is ducted

Minimum Height above  
Cooktop to lowest point  
of rangehood:

650 mm

NOTE: Measurements are within 2- 3mm factory tolerance. It is advisable to check dimensions of physical product when measuring for installation and before doing any cut outs.

\*Due to continual product development the information provided is not final and may be subject to change.