

Products made from E0 MR Craftwood

- **easyvj**
- **easyraw**
- **easyregency**
- **easygroove**
- **easyline**
- **easyascot**
- **easybeaded**

Trade Essentials E0 MR Craftwood®

Trade Essentials E0 Craftwood MR is a highly moisture resistant Medium Density Fibreboard (MDF), with extremely low formaldehyde levels ($\leq 0.5\text{mg/L}$) suitable for use in areas of high humidity, or where accidental wetting may occur. The high moisture resistant properties of E0 Craftwood MR is due to the bonding of the wood fibres with a specially formulated moisture resistant resin system. E0 Craftwood MR MDF is a wood based panel and reacts to changes in moisture like natural timber, ie. high or low humidity may cause some expansion or contraction without any degradation to the strength of the board.

Applications


E0 Craftwood MR® MDF is designed for interior use such as kitchen cupboards, bathroom vanities, laundry cupboards, shelving, wall lining (if used with a suitable jointing system) and mouldings.

Note: E0 Craftwood MR MDF is not recommended for exterior use.

PROPERTIES

(Typical physical properties when tested to AS/NZS 1859.2)

Specifications	Unit	THICKNESS		
		9mm - 12mm	13mm - 22mm	23mm - 32mm
Thickness Tolerance	mm	+/-0.2	+/-0.3	+/-0.3
Board Density	kg/m ³	760	730	700
Internal Bond	MPa	1.00	0.90	0.70
Modulus of Rupture	MPa	46.0	43.0	38.5
Modulus of Elasticity	MPa	3600	3600	3400
Surface Soundness	MPa	1.3	1.7	1.8
Screw Holding - Face	N		≥ 700	≥ 700
Screw Holding - Edge	N		≥ 1100	≥ 1100
Thickness Swell (24hr)	%	<7	<4	<4
Wet Bending Strength (Method A)	MPa	10.5	9.7	8.5
Formaldehyde level	mg/L	≤ 0.5	≤ 0.5	≤ 0.5

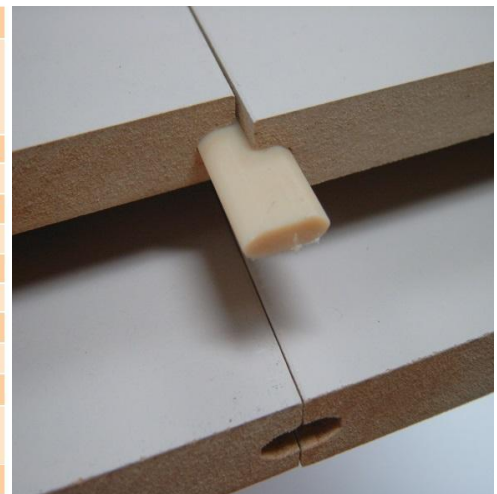

FIRE HAZARD INDICES

(Typically achieved when tested to AS/NZS 1530.3)

Indices	Result	Range
Ignitability	14	0-20
Spread of Flame	8	0-10
Heat Evolved	7	0-10
Smoke Developed	4	0-10

FIRE TEST RESULTS

Cone Calorimeter (Results when tested in accordance with AS/NZS 3837)

Classification	Result
Group Number	3
Average Specific Extinction Area	47.0Kg/m ²

WEIGHT

Thickness	9mm	12mm	16mm	18mm	25mm	32mm
kg per m ²	7.0	9.0	11.6	13.1	17.6	22.1

