

ozito

2-IN-1 WET & DRY VACUUM / BLOWER


1300W 30L / 360KM/H

INSTRUCTION MANUAL


SPECIFICATIONS

Mains Voltage:	220-240V ~ 50-60Hz
Input Power:	1300W
Max. Suction Power:	120mbar
Inlet Air Flow:	45-60L/s
Tank Capacity:	30L
Max. Air Speed:	360km/hour
Hose Diameter:	Ø64mm
Hose Length:	1.8m
Weight:	8.4kg

ozito.com.au

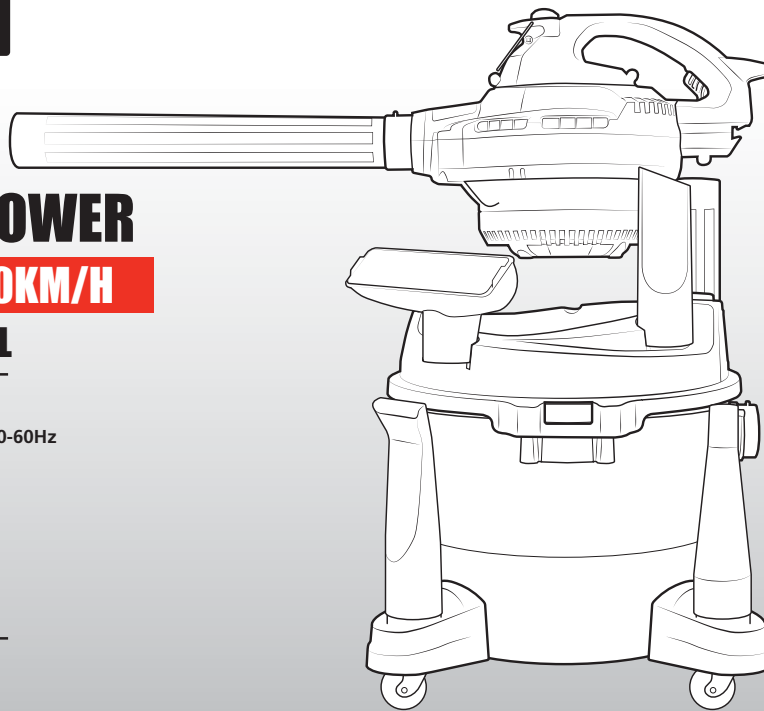


STANDARD EQUIPMENT



2-in-1 Wet & Dry Vacuum/ Blower



Angled Nozzle, Concentrator Nozzle, Crevice Tool, Floor Tool & 2 x Extension Tubes



1.8m Hose, Foam Filter & Cartridge Filter & Lid



Shoulder Strap & Mounting Ring, Noise Diffuser, Blower Adaptor & 4 x Castor Wheels

3

YEAR REPLACEMENT WARRANTY

WDVB-1312

WARRANTY

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO YOUR NEAREST BUNNINGS WAREHOUSE WITH YOUR BUNNINGS REGISTER RECEIPT. PRIOR TO RETURNING YOUR PRODUCT FOR WARRANTY PLEASE TELEPHONE OUR CUSTOMER SERVICE HELPLINE:

Australia 1800 069 486

New Zealand 0508 069 486

TO ENSURE A SPEEDY RESPONSE PLEASE HAVE THE MODEL NUMBER AND DATE OF PURCHASE AVAILABLE. A CUSTOMER SERVICE REPRESENTATIVE WILL TAKE YOUR CALL AND ANSWER ANY QUESTIONS YOU MAY HAVE RELATING TO THE WARRANTY POLICY OR PROCEDURE.

The benefits provided under this warranty are in addition to other rights and remedies which are available to you at law.

Our goods come with guarantees that cannot be excluded at law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Generally you will be responsible for all costs associated with a claim under this warranty, however, where you have suffered any additional direct loss as a result of a defective product you may be able to claim such expenses by contacting our customer service helpline above.

3 YEAR REPLACEMENT WARRANTY

Your product is guaranteed for a period of **36 months from the original date of purchase**. If a product is defective it will be replaced in accordance with the terms of this warranty. Warranty excludes consumable parts, for example: valve adapters and accessories.

WARNING


The following actions will result in the warranty being void.

- If the tool has been operated on a supply voltage other than that specified on the tool.
- If the tool shows signs of damage or defects caused by or resulting from abuse, accidents or alterations.
- Failure to perform maintenance as set out within the instruction manual.
- If the tool is disassembled or tampered with in any way.
- Professional, industrial or high frequency use.

KNOW YOUR PRODUCT


2-IN-1 WET & DRY VACUUM / BLOWER

- | | |
|--------------------------|----------------------------|
| 1. Cord Hook | 11. Angled Nozzle |
| 2. Blower Release Button | 12. Castor Wheel |
| 3. Carry Handle | 13. Vacuum Tank |
| 4. On/Off Button | 14. Lid Latch |
| 5. Strap Mounting Ring | 15. Accessory Storage Slot |
| 6. Concentrator Nozzle | 16. Drain Outlet Cap |
| 7. Blower Port | 17. Vacuum Port |
| 8. Noise Diffuser | 18. Tank Lid |
| 9. Blower Intake Lid | 19. Crevice Tool |
| 10. Floor Tool | 20. Extension Tube |

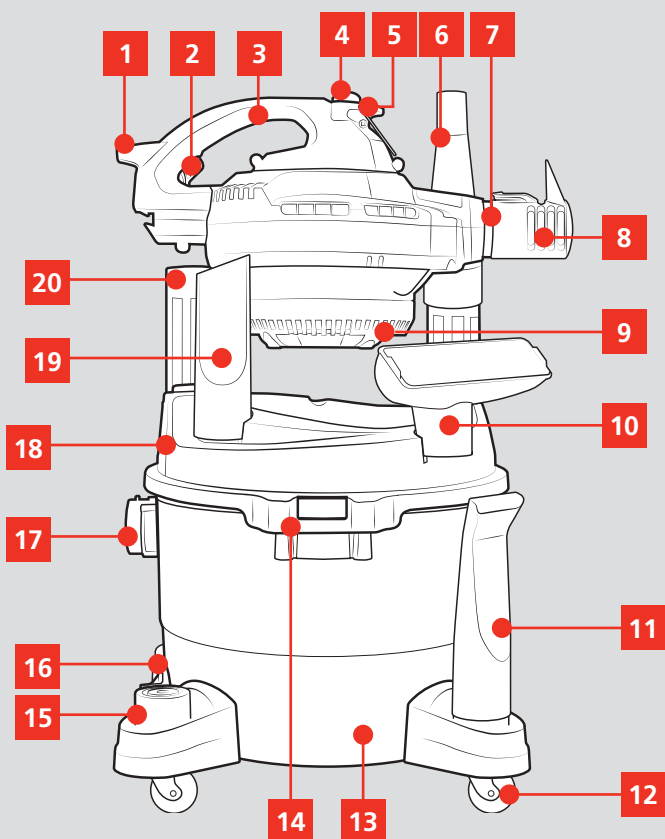

ACCESSORIES

- | | |
|-----------------|----------------------------|
| 21. 1.8m Hose | 23. Cartridge Filter & Lid |
| 22. Foam Filter | 24. Blower Adaptor |

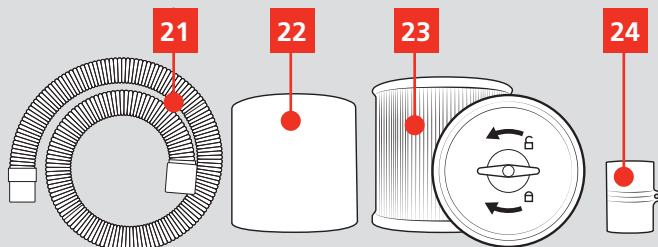

ONLINE MANUAL

Scan this QR Code with your mobile device to take you to the online manual.



SETUP & PREPARATION


1. ASSEMBLY




WARNING! ENSURE THE TOOL IS TURNED OFF AND DISCONNECTED FROM THE POWER SUPPLY BEFORE PERFORMING ANY OF THE FOLLOWING OPERATIONS.

Attaching The Feet & Castors

1. Press in the tabs on the latches to release the tank lid.
2. Remove the tank lid and empty the tank of all accessories.

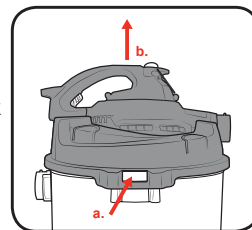

3. Turn the tank upside down and insert a castor foot into the slot on the side of the tank.

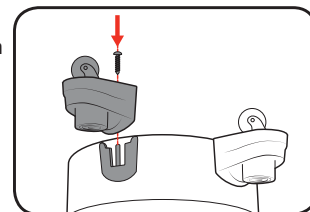

4. Insert a screw into the hole and tighten with a Philips head screwdriver (not supplied).

5. Repeat steps 3 & 4 with the other 3 castor wheels.


6. Turn the tank right side up and replace the lid.

Note: Always ensure that the latch tabs have clicked back into place and the tank lid is securely attached.

Noise Diffuser

The diffuser can be used for quieter operation during vacuuming.


1. Insert the locking end onto the blower port and turn clockwise to lock it into place.

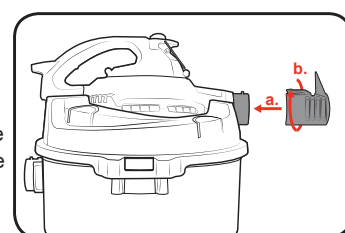

Attaching The Blower Strap

For easier usage, the strap can be used to carry the Blower unit on your shoulder when it is detached from the vacuum tank.

1. Insert one end of the mounting ring into the blower unit and pull the other end around the front of the unit.

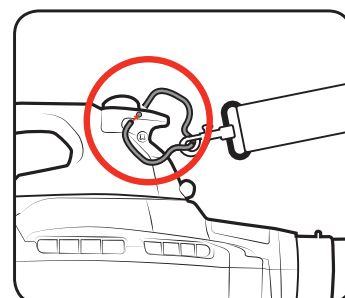

2. Attach the clip on the strap to the mounting ring. Adjust the strap as necessary.

3 YEAR REPLACEMENT WARRANTY

2. FILTER SELECTION




WARNING! NEVER USE THE WET & DRY VACUUM CLEANER WITHOUT A FILTER. ALWAYS ENSURE THAT THE FILTERS ARE PERFECTLY SECURE.

Fitting the Cartridge Filter - Vacuuming Dry Matter

The cartridge filter should come pre-assembled onto the vacuum unit. However it is still a good idea to check that it has not come loose during transport and is still properly fitted before use.

For dry vacuum cleaning always use the cartridge filter. Mount the filter so that no air is sucked through the filter cage without first being filtered.

1. Press the flat end of the cartridge filter onto the filter cage until it is stopped by the step in the lid part.
2. Place the filter lid on the bottom of the filter and turn the handle clockwise to lock it into place.

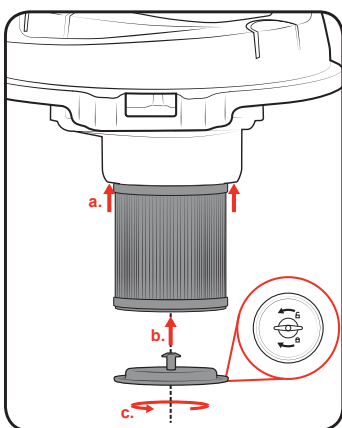


3. To remove the filter, turn the filter lid handle anti-clockwise to release it. Remove both the filter lid and cartridge filter.

NOTE: Do not use the foam filter when vacuuming dry matter.

Fitting the Foam Filter - Vacuuming Liquid

For wet-vacuuming, slip the supplied foam filter over the filter cage.

NOTE: Do not use the cartridge filter when vacuuming liquid.

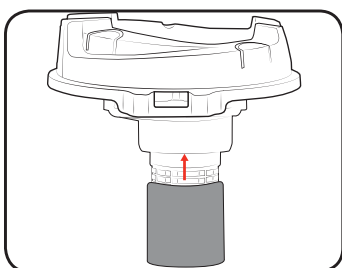

WARNING! SWITCH OFF THE EQUIPMENT IF LIQUID OR FOAM IS EMITTED WITH THE EXHAUST AIR WHEN WET VACUUM CLEANING.



WARNING! THE WET & DRY VACUUM IS NOT SUITABLE FOR THE VACUUMING OF COMBUSTIBLE LIQUIDS.



WARNING! WHEN WET VACUUMING, THE SAFETY FLOAT STOPS THE VACUUM SUCTION AUTOMATICALLY WHEN THE MAXIMUM CAPACITY IS REACHED. TURN OFF THE VACUUM & EMPTY THE TANK BEFORE CONTINUING TO VACUUM.

3. WASTE DISPOSAL

Draining Liquids From The Tank


Spills and puddles can be vacuumed directly into the tank with the foam filter fitted for easy clean up and disposal.

Note: When vacuuming large quantities of liquid, do not immerse the nozzle completely into the liquid, leave a gap at the nozzle/tool to allow air inflow.


1. Hold the vacuum over a laundry sink or household drain.

Note: Only dispose of liquid waste into household sinks & drains if safe to do so. Improper disposal of hazardous waste can cause pollution and harm.


2. Turn the drain outlet cap anti-clockwise to loosen and remove it.

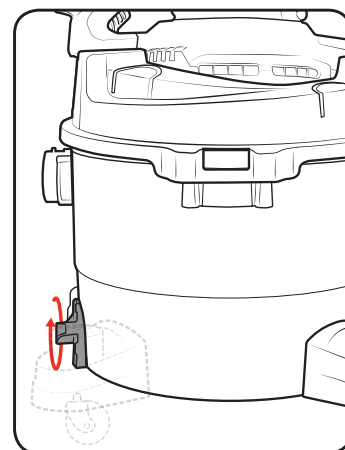

3. Allow any collected liquid in the tank to flow out. Tip the vacuum slightly to allow any liquid at the bottom of the tank to flow out too.

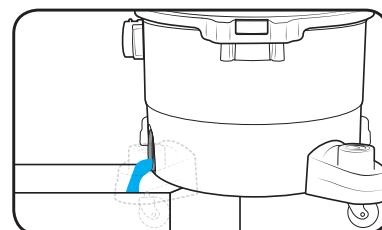

4. Rinse out the tank if necessary and replace the drain outlet cap.

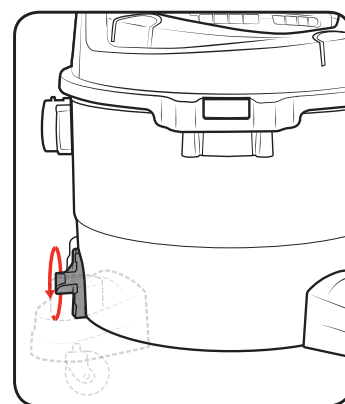


4. ATTACHING HOSES & NOZZLES

Hose Outlet Selection


Connect the suction hose to the appropriate outlet on the wet and dry vacuum, depending on the application required:

Vacuuming

Connect the hose to the vacuum inlet and twist it clockwise to lock it in place.

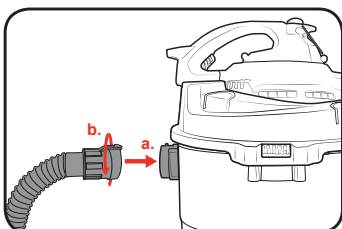



WARNING! ALWAYS CONNECT NOISE DIFFUSER TO THE BLOWER PORT DURING VACUUMING OPERATION.

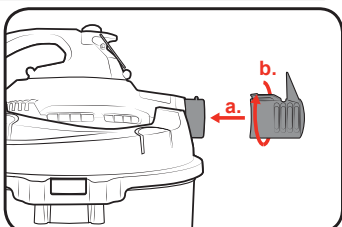

Extension Tubes


The suction hose can be extended by attaching one or more sections of the extension tubes.

Alternatively, the blower unit can also be detached from the vacuum tank to be used outdoors as a separate tool. In which case the adaptor can be fitted to the blower port and an extension tube connected to the other end of the adaptor for a longer blowing nozzle.

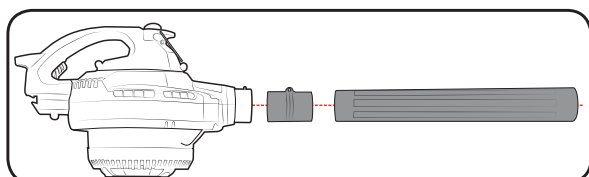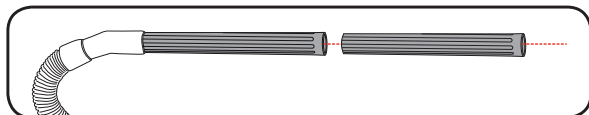


Floor Tool

The floor tool is for vacuuming solids and liquids over medium to large areas.

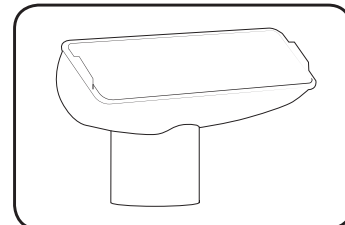


Crevice Tool

The crevice tool is designed for cleaning crevices and edges.



Angled Nozzle

The angle nozzle can be used for vacuuming in narrow channels and grooves or during blowing operations.



Concentrator Nozzle

The concentrator nozzle can be used for spot vacuuming & blowing.




OPERATION

5. CONTROLS

WARNING! TO REDUCE THE RISK OF ELECTRICAL SHOCK, A RESIDUAL CURRENT DEVICE (RATED 30mA OR LESS) SHOULD BE USED.

Powering Up The Unit

1. Press the side of the switch marked 'I' to turn the unit on.

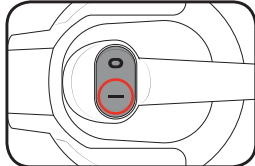


2. Press the side of the switch marked 'O' to turn the unit off.

WARNING! DO NOT SWITCH THE UNIT ON IN ENCLOSED OR POORLY VENTILATED SPACES OR IN THE PRESENCE OF FLAMMABLE AND/OR EXPLOSIVE LIQUIDS, GASES & POWDERS.


Detaching The Blower

The blower is ideal for blowing leaves, grass clippings and other debris outdoors.

1. To detach the blower unit, press and hold the blower release button.

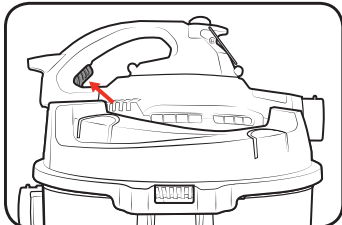


2. Lift the blower unit off the tank lid by the carry handle.

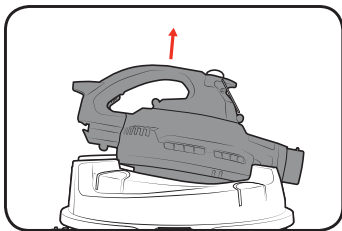

Note: Ensure that the power cord is not caught on any of the accessories.

3. To reconnect the blower, hold down the blower release button, lower the front end of the unit into the cradle on the lid and then slide the back end of the blower unit into place.

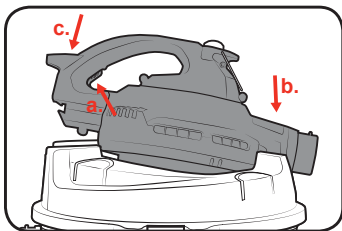


WARNING! ALLOW TO DRY BEFORE USE IF THE BASE OF THE BLOWER UNIT IS DAMP WHEN YOU DETACH IT FROM THE TANK LID.

6. BLOWER FUNCTION

Using The Blower

Hold the blower firmly, switch on the unit and point the jet of air in front of you while moving forward slowly. Move the blower from side to side with the attached tubes/nozzles several inches off the ground.

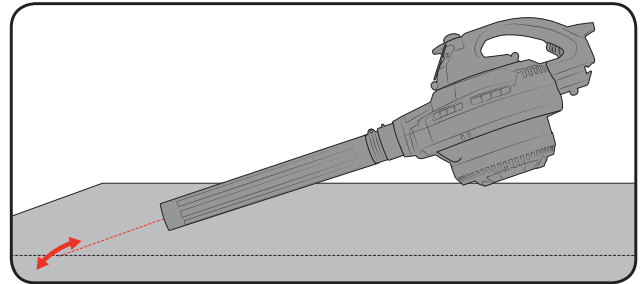

Be careful where you point the jet of air as it can move heavy material and cause injury or damage to bystanders.

Note: Avoid collisions with hard objects which could damage your machine.

WARNING! BE AWARE OF PEOPLE & ANIMALS IN THE VICINITY OF WHERE YOU ARE OPERATING THE BLOWER.

WARNING! DO NOT POINT THE BLOWER NOZZLE AT OTHER PEOPLE OR ANIMALS.

After using the blower, examine the bottom of the blower for debris and blockages and remove if found.

WARNING! DO NOT PLACE THE BLOWER ON THE GROUND OR OTHER SURFACES WHILE THE UNIT IS OPERATING AS ROCKS AND DEBRIS CAN BE SUCKED UP, POTENTIALLY DAMAGING THE UNIT AND BLOWING OUT ROCKS OR DUST.

7. TROUBLESHOOTING

Symptom	Possible Cause	Suggested Solution
Vacuum does not start	No power supply	Check power cord, household breakers and fuses.
	Faulty power cord	Unplug and check the power cord. If damaged, have it repaired by a qualified electrician.
	Container full	Empty container.
Dust comes out of the motor cover	The cartridge filter is missing or damaged	Attach or replace cartridge filter
Reduced efficiency and motor/speed vibration	There is a blockage in the nozzle, hose or container inlet.	Check nozzle, hose and container inlets for blockage.
	The cartridge filter is clogged by fine dust.	Take off the filter and clean it or install a new cartridge filter.

MAINTENANCE




WARNING! BEFORE CLEANING OR CARRYING OUT ANY MAINTENANCE PROCEDURE, MAKE SURE THAT THE TOOL IS SWITCHED OFF & DISCONNECTED FROM THE POWER SUPPLY TO PREVENT ACCIDENTAL STARTING.

Cleaning The Cartridge Filter

Clean or change the filter regularly for optimal performance.

1. Turn the handle on the filter lid anti-clockwise to release it, then remove the lid and the cartridge filter.

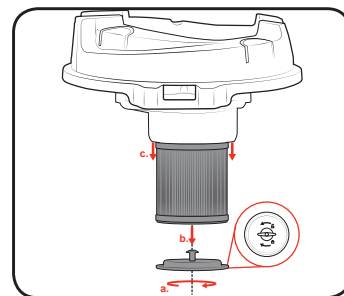

2. Clean the cartridge filter by gently tapping or brushing any dirt off.



WARNING! CLEANING SHOULD NOT BE PERFORMED INDOORS IN LIVING AREAS.


Note: The cartridge filter is designed to stop small dust particles and should be used for dry pick-up only. If the filter is wet, it will clog up quickly and be very difficult to clean.

Note: Wet filters should be removed and allowed to air dry for 24 hours before use.

3. Check the filters for tears or small holes before replacing it onto the unit. Use a replacement cartridge filter if small holes or tears are found.


Cleaning The Foam Filter

1. Use a mild soap and water solution to wash the foam filter, then rinse with water.
2. Allow to air dry completely before installing for use again.

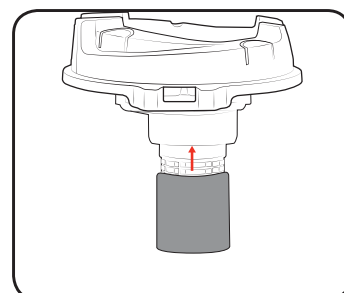


Cleaning The Blower Intake Pad

1. Remove the four screws on the base of the blower unit and remove the intake lid.

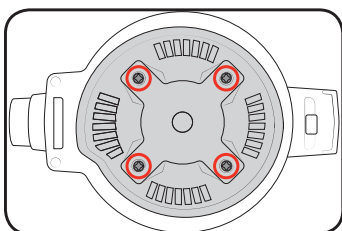

2. Remove the foam pad and clean it with soapy water.

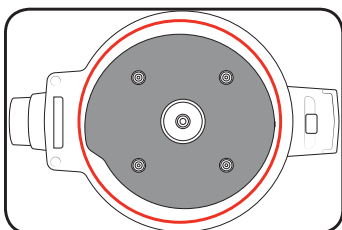

3. Allow the foam pad to air dry completely before replacing for use.

4. Reinstall the intake lid and screws.



WARNING! DO NOT OPERATE THE TOOL WITHOUT THE FOAM INTAKE PAD AND LID ATTACHED.

Cleaning The Housing

Clean the appliance regularly with a damp cloth. Do not use cleaning agents or solvents; these may be aggressive to the plastic parts in the appliance.

Storage

Ensure the vacuum tank has been fully emptied of any dry matter or liquid before it is stored. Wrap the power cable around the cable hooks. Keep all the accessories with the unit to avoid losing them.

Keep in a dry place out of reach of children.

Supply Cords

If the supply cord of this power tool is damaged, it must be replaced by a specially prepared cord available through the service organisation.

Note: Ozito Industries will not be responsible for any damage or injuries caused by the repair of the tool by an unauthorised person or by mishandling of the tool.

DESCRIPTION OF SYMBOLS

	Regulatory Compliance Mark (RCM)		Warning
	Wear hearing & eye protection		Double Insulated
	Keep bystanders away. Do not operate whilst people especially children or pets are in the area.		Do not use in the rain or leave outdoors while it is raining.
	Disconnect from power supply before performing any maintenance procedures	IPX4	Ingress protection against water from any direction
	Read instruction manual		

CARING FOR THE ENVIRONMENT



Power tools that are no longer usable should not be disposed of with household waste but in an environmentally friendly way. Please recycle where facilities exist. Check with your local council authority for recycling advice.



Recycling packaging reduces the need for landfill and raw materials. Reuse of recycled material decreases pollution in the environment. Please recycle packaging where facilities exist. Check with your local council authority for recycling advice.

SPARE PARTS

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse.

For further information, or any parts not listed here, visit www.ozito.com.au or contact Ozito Customer Service:

Australia 1800 069 486

New Zealand 0508 069 486

E-mail: enquiries@ozito.com.au

ELECTRICAL SAFETY



WARNING! When using mains-powered tools, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, personal injury and material damage.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool.

Save these instructions and other documents supplied with this tool for future reference.



This tool is double insulated; therefore no earth wire is required.

Note: Double insulation does not take the place of normal safety precautions when operating this tool. The insulation system is for added protection against injury resulting from a possible electrical insulation failure within the tool.

If the supply cord is damaged, it must be replaced by a specially prepared cord available through the service organisation.

Supply cords shall not be lighter than:

- if rubber insulated, ordinary tough rubber sheathed flexible cord (code designation 60245 IEC 53);
- if polyvinyl chloride insulated, ordinary polyvinyl chloride sheathed flexible cord (code designation 60227 IEC 53).

Using an Extension Lead

Always use an approved extension lead suitable for the power input of this tool. Before use, inspect the extension lead for signs of damage, wear and ageing. Replace the extension lead if damaged or defective. When using an extension lead on a reel, always unwind the lead completely. Use of an extension lead not suitable for the power input of the tool or which is damaged or defective may result in a risk of fire and electric shock.

The power supply for this product should be protected by a residual current device (rated at 30mA or less). A residual current device reduces the risk of electric shock.

GENERAL POWER TOOL SAFETY WARNINGS



WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

1. Work area safety

- Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
 - Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
 - Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.
- ## 2. Electrical safety
- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
 - Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
 - Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
 - Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.
 - When operating a power tool outdoors, use an extension cord suitable for outdoor use.** Use of a cord suitable for outdoor use reduces the risk of electric shock.

3. Personal safety

- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- Use personal protective equipment. Always wear eye protection.** Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

- Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
 - Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
 - Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts.** Loose clothes, jewellery or long hair can be caught in moving parts.
 - If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.
 - Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.** A careless action can cause severe injury within a fraction of a second.
- ## 4. Power tool use and care
- Do not force the power tool. Use the correct power tool for your application.** The correct power tool will do the job better and safer at the rate for which it was designed.
 - Do not use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
 - Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools.** Such preventive safety measures reduce the risk of starting the power tool accidentally.
 - Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** Power tools are dangerous in the hands of untrained users.
 - Maintain power tools.** Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
 - Keep cutting tools sharp and clean.** Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
 - Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** Use of the power tool for operations different from those intended could result in a hazardous situation.
 - Keep handles and grasping surfaces dry, clean and free from oil and grease.** Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.
- ## 5. Service
- Have your power tool serviced by a qualified repair person using only identical replacement parts.** This will ensure that the safety of the power tool is maintained.

WET & DRY VACUUM / BLOWER SAFETY WARNINGS



WARNING! The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.

Young children should be supervised to ensure that they do not play with the appliance.

When using the equipment, a few safety precautions must be observed to avoid injuries and damage. Please read the complete operating manual with due care. Keep this manual in a safe place so that the information is available at all times. If you give the equipment to any other person, give them these operating instructions as well.

We cannot accept any liability for damage or accidents which arise due to a failure to follow these instructions and the safety information.

The equipment is to be used only for its prescribed purpose. Any other use is deemed to be a case of misuse. The user / operator and not the manufacturer will be liable for any damage or injuries of any kind caused as a result of this.

- Read the instructions carefully. Be familiar with the controls and the proper use of the appliance.
- Switch off and remove plug from mains before cleaning or maintenance.
- Do not use in the rain or leave outdoors while it is raining.
- Keep bystanders away.
- Never allow children to use the appliance
- Never allow people unfamiliar with these instructions to use the appliance. Local regulations may restrict the age of the operator
- The operator or user is responsible for accidents or hazards occurring to other people or their property
- Always wear adequate protective clothing when operating the tool to avoid injuries to face, eyes, hand, feet, head or hearing. Use safety glasses or a face shield, high boots or sturdy shoes, long trousers, work gloves, a hard hat and ear defenders.
- Do not start the tool when it is upside down or when it is not in the operating position.
- Ensure that the extension lead is secured in a manner that prevents it from disconnecting from the plug whilst in use.
- Keep all the air intakes and the blower tube free of dust, lint, hair and other material that may cause a reduction in air flow.
- Do not place blower on floor or other surfaces whilst still operating, the air intake can suck up and blow out dust and rocks
- To avoid electric shock, do not expose to rain. Store indoors.
- Never use in the presence of explosive liquids, vapours or explosive dust – such as coal or grain.
- Never operate the appliance while people, especially children, or pets are nearby.
- While operating the appliance, always wear substantial footwear and long trousers.
- Do not wear loose clothing or jewellery that can be drawn into the air inlet. Keep long hair away from the air inlets.
- Wear protective goggles while operating the unit.
- To prevent dust irritation, the wearing of a face mask is recommended.
- Before using, check the supply and extension cord for signs of damage and aging. Do not use the

appliance if the cord is damaged or worn.

- Never operate the appliance with defective guards or shields, or without safety devices, for example debris collector in place.
- Do not use cleaner without the filter in place.
- Only use a weather proof extension cable fitted with a coupler according to IEC 60320-2-3.
- Always direct the power cord to the rear away from the appliance.
- If a cord becomes damaged during use, disconnect the supply cord from the mains immediately. DO NOT TOUCH THE CORD BEFORE DISCONNECTING THE SUPPLY.
- Do not carry the appliance by the cable.
- When lifting the unit, always lift it with the handle or under rim of bucket. Beware of excess weight.
- The wet and dry vacuum cleaner is designed for wet and dry vacuuming using the appropriate filter. The appliance is not suitable for the vacuuming of combustible, explosive or harmful substances.
- Never pick up or blow asbestos or asbestos dust.
- Wood dust and chips in a confined area can give rise to fire or an explosion. Guard against possible ignition sources.
- Do not pick up anything that is burning or smouldering – such as metal grinding dust, cigarette ends, hot coals, matches or similar.
- Disconnect the appliance from the mains supply
 - whenever you leave the machine;
 - before clearing a blockage;
 - before checking, cleaning or working on the appliance
 - if the appliance starts to vibrate abnormally.
- Always switch the unit off before changing attachments or connecting different power tools.
- Operate the appliance only in daylight or in good artificial light.
- Do not overreach and keep your balance at all times.
- Always be sure of your footing on slopes.
- Walk, never run.
- Never blow debris in the direction of bystanders.
- Keep all nuts, bolts and screws tight to be sure the appliance is in safe working condition.
- Check the debris collector frequently for wear or deterioration.
- Keep all cooling air inlets clear of debris.
- Always check that the filter is clear and not blocked. Keep all openings clear of any blockages.
- If motor sound becomes higher pitched always check for the following:
 - Blocked hose or accessory.
 - Blocked filter.
 - Full container.
- Replace worn or damaged parts.
- Use only genuine replacement parts and accessories.
- Never modify the cleaner in any way - this is dangerous and will invalidate the warranty.
- Store the appliance only in a dry place.