Preparation

Surfaces should be adequately degreased and free from dust and latent surface including form release agents.

Efflorescence should be removed with CROMMELIN EFFLORESCENCE REMOVER.

CROMMELIN PAVING SEALERS must be applied to a dry surface.

Dampness in the concrete or pavers could spoil the clear finish by affecting the adhesion or by turning it milky. To test for moisture, tape a clear plastic sheet (300mm x 300mm) over the concrete pavers in the suspect damp area. If moisture appears on the underside of the plastic within 2 hours, the pavers are too damp. Leave for a few days and test again.

Application



Prior to application the product must be applied to a small test area to assess the desired finish, sheen and degree of slip resistance.

CROMMELIN PAVING SEALERS can be applied by brush, roller or spray.







The 2nd coat should be applied unthinned.

Sealing of sloping surfaces may increase the potential for pedestrians to slip. Broadcasting dry silica sand over the 1st coat of sealer when it is still tacky will reduce the potential for pedestrians to slip. Before applying the 2nd coat, broom off any loose silica sand.

Maintenance

All sealed surfaces can be cleaned with detergent and/or high pressure cleaner.


If required all sealers can be recoated without removal. To do so follow above preparation rules.

Crommelin

Clear Sealers
Roof Coatings
Waterproofing
Cement Additives

7 Day Freecall Technical Advice 1800 655 711

www.crommelin.com.au

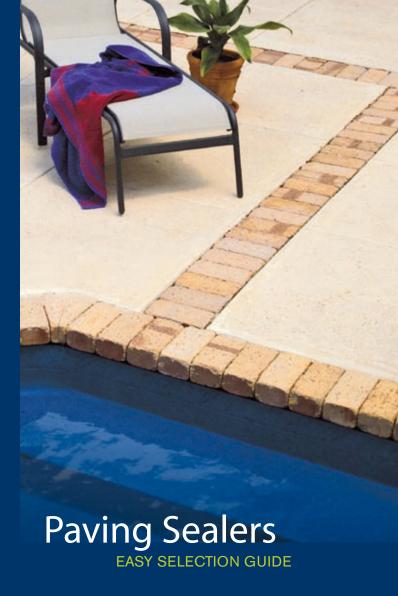

© Crommelin



72 Division Street Welshpool Western Australia 6106 T + 61 8 9458 5711 F + 61 8 9451 4749 service@crommelin.com.au www.crommelin.com.au



Sealers

Crommelin - Over 45 years

Since 1958 the Crommelin name has been at the forefront of the coatings industry throughout Australia and various other countries.

Today, after years of market research, product testing and refinement, Crommelin offer a range of sealers suitable for most situations.

All Crommelin sealers have been manufactured with ease of application in mind. Using standard application tools anyone can create a lasting stain-resistant barrier that can preserve, restore, beautify and protect your paving.

Crommelin Sealers **Wet Look Paving Sealer** Concrete Paving Sealer **Selection** Chart Water **Driveways** Clay •00 $\bullet \bullet \circ$ 000 000 Concrete (Inc. stencilled) •00 ••0 ... ••• Reconstituted Pavers •00 $\bullet \bullet \circ$ Patio Entertainment Areas Clay •00 ••• 000 000 Concrete (Inc. stencilled) •00 ••• ••• ••• Reconstituted Pavers •00 **Pool Surrounds** Clay ••• •00 000 000 Concrete (Inc. stencilled) ••• •00 $\bullet \bullet \circ$ •00 Reconstituted Pavers ••• •00 $\bullet \bullet \circ$ •00 • O O Acceptable • • • Good • • • Excellent

Some sealers are best suited to particular areas, i.e. pool surrounds or driveways

Sealer Sheen Guide







