


## INSTRUCTIONS FOR RUNNER PLACEMENT

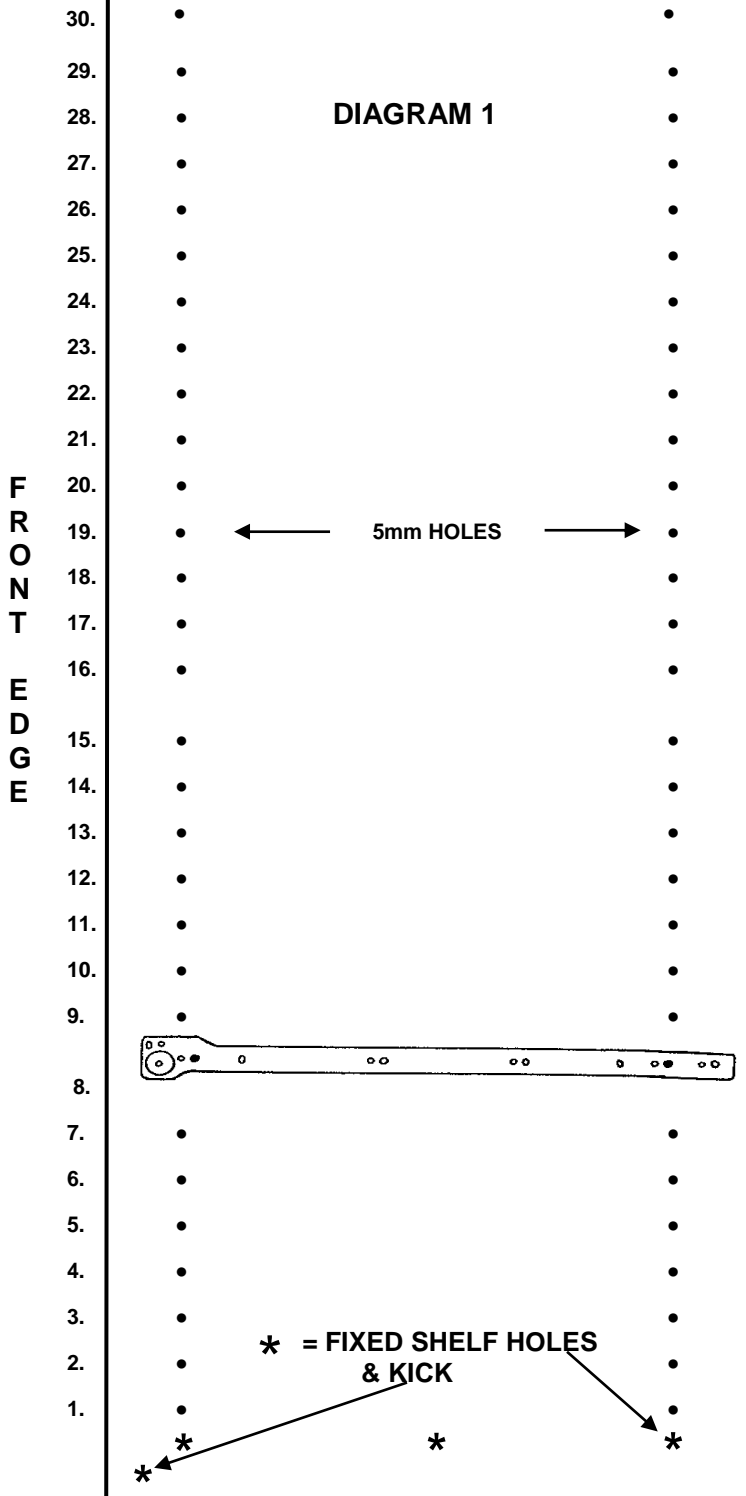

**UNIT GABLE - BOTTOM**

Place metal runners in their correct hole positions (see above) making sure CL = LEFT HAND GABLE & CR = RIGHT HAND GABLE, then attach using the special 7.5mm euro screws provided (see diagram 1)

### IMPORTANT

#### Executive Series

Models	Hole Positions	Fixed Shelf Position
EXC - 4J	1 - 8 - 15 - 22	N/A
EXC - 5C	1 - 8 - 15 - 20 - 25	N/A
EXC - 4B	8 - 16 - 24 - 32	N/A
EXC - 2B	8 - 14	N/A
EXB - 5C	1 - 8 - 15 - 20 - 25	N/A
EXB - 4J	1 - 8 - 15 - 20	N/A
EXB - 4B	8 - 16 - 22 - 28	N/A

#### MAXI ULTRA 'H' SERIES

Models	Hole Positions	CAM PIN-Hole Positions
H1	1	8
HS2	1	8 - 15
H2	1 - 8	13
HS		8

#### MAXI ULTRA & ULTRA SERIES

Models	Hole Positions	Models	Hole Positions
450	1-6-11-16	LSD550	1-8
315C	1-8-15-20	LSD330	1
515	1-6-11-16-21	LSS550	1-8

#### Executive 750 'H' SERIES

Models	Hole Positions	CAM PIN-Hole Positions
HS		8
H1	1	8
H2	1 - 6	11
H3	1 - 8 - 13	20

#### MAXI & MSM SERIES

Models	Hole Positions	Fixed Shelf Position
16J3	1 - 8 - 15	22
C16	1 - 8 - 15 - 20 - 25	30
C06	1 - 8 - 15 - 20 - 25	30
600J3	8 - 15 - 22	
400J3	1 - 8 - 15	

7.5mm EURO SCREW  
NOTE: MAKE SURE CORRECT HOLES ARE USED.

