



To order, or for enquiries

Phone: 1300 526 879

Email: sales@wetareas.com.au

Web: www.wetareas.com.au

SQUARE OUTLET TILE-OVER TRAY SYSTEMS

<u>Includes</u> Tile-Over Tray + Pre-folded Flashing (3 sides) + Puddle Flange/Outlet Kit



Fineline	Size/Outlet Position	
0177588	Tile-Over Tray 900 x 900 Centre Outlet (3 Sided)	
0177589	Tile-Over Tray 900 x 900 Rear Outlet (3 Sided)	
0177595	Tile-Over Tray 900 x 900 Rear Outlet (4 Sided)	
0177596	Tile-Over Tray 900 x 1100 Rear Outlet (4 Sided)	
0177597	Tile-Over Tray 900 x 1200 Rear Outlet (4 Sided)	
0177598	Tile-Over Tray 900 x 1400 Rear Outlet (4 Sided)	
0177600	Tile-Over Tray 900 x 1700 Rear Outlet (4 Sided)	
0177590	Tile-Over Tray 1000 x 1000 Centre Outlet (3 Sided)	
0177591	Tile-Over Tray 1000 x 1000 Rear Outlet (3 Sided)	
0177601	Tile-Over Tray 1000 x 1500 Rear Outlet (4 Sided)	
0177593	Tile-Over Tray 1200 x 900 Centre Outlet (3 Sided)	
0177594	Tile-Over Tray 1200 x 900 Rear Outlet (3 Sided)	
0177602	Tile-Over Tray Custom up to 1000 x 1000 (4 Sided)	
0177604	Tile-Over Tray Custom up to 1000 x 1500 (4 Sided)	

Pineline Size 0177621 DensShield 6mm 1220mm x 2438mm 0177622 DensShield 13mm 1220mm x 2438mm 0177623 DensShield 16mm 1220mm x 2438mm

CHANNEL OUTLET TILE-OVER TRAY SYSTEMS Includes Tile-Over Tray + Pre-folded Flashing (3 sides) + Drain Tray + Tile-In or Wedge Mesh Insert Fineline Size/Outlet Position 0177605 Tile-Over Tray System 900 x 900 Rear Channel Tile-In 0177607 Tile-Over Tray System 900 x 1200 Rear Channel Tile-In 0177606 Tile-Over Tray System 1200 x 900 Rear Channel Tile-In 0177608 Tile-Over Tray System 900 x 900 Rear Channel Mesh 0177610 Tile-Over Tray System 900 x 1200 Rear Channel Mesh

SOLID SURFACE SHOWER BASES

<u>Includes</u> Shower Base with 2 Wall Lips + 2 Screen Lips + Chrome-Plated Solid Brass or Solid Surface Channel Outlet



Fineline	Size/Outlet Position	
0177611	Solid Surface Shower 900 x 900 Left Hand Outlet	
0177612	Solid Surface Shower 900 x 900 Right Hand Outlet	
0177613	Solid Surface Shower 900 x 1200 Rear Outlet	
0177614	Solid Surface Shower 1200 x 900 Rear Outlet	
0177617	Solid Surface Shower 900 x 900 Left Channel Outlet	
0177618	Solid Surface Shower 900 x 900 Right Channel Outlet	
0177619	Solid Surface Shower 900 x 1200 Rear Channel Outlet	
0177620	Solid Surface Shower 1200 x 900 Rear Channel Outlet	

^{*} Sizes are nominal - check technical drawings available at www.wetareas.com.au

Solid Surface Shower Bases




High Quality—Solid Surface Shower Bases are made from an advanced blend of natural minerals, pigments and acrylic resin and do not contain crystalline Silica.

Low Profile—Locally designed and manufactured in Australia, this Shower Base is one of the world's thinnest but is extremely resilient and strong. They are designed to create a seamless look from your floor to your shower base.

Easy Care—They are completely non porous, easy to clean, stain resistant and slip resistant

We also manufacture CUSTOM SIZED bases to order—call us to discuss

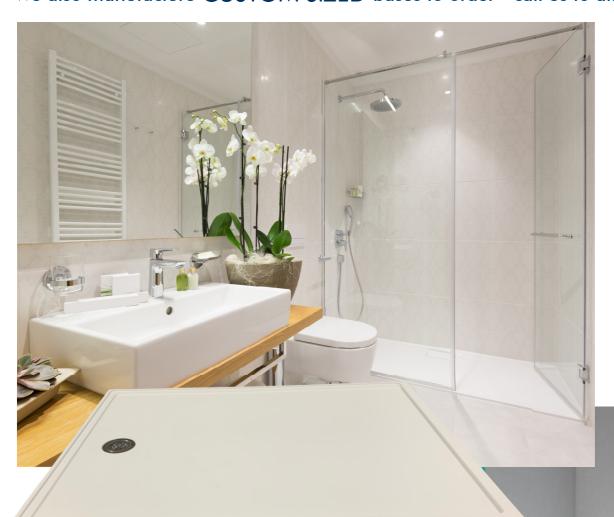

Available with round or channel outlet Round outlet bases are only 22mm (at the highest point) whilst our channel outlet bases are only 34mm high (at the highest point) — all bases have a built in fall to the waste.



100% Leak Proof - Your Insurance

One piece mould - NO JOINS to fail and cause leakage Unique 'lip/flashing' design



Supplied with

- Pre-folded flashing (3 sides) to suit 6mm wall board
- Adjustable height waste 80 x 80mm outlet kit (includes grate)
- Vinyl waste available on request (at time of ordering)

Square or Channel Outlet



Custom Sizes Available—Call to Discuss

- $\overline{\mathbf{V}}$ Designed & manufactured in Australia by an Australian owned company
- $\overline{\mathsf{V}}$ Moulded in fall to waste
- $\overline{\mathsf{V}}$ Extremely strong - Lightweight - Maintenance free
- $\overline{\mathsf{V}}$ Easy to install - simplified plumbing connection - non check-in
- $\overline{\mathsf{V}}$ Manufactured with 3 or 4 lips (easily trimmed for multiple side level entry)



Wedge Mesh Insert



DensShield® Waterproof

First tile backer board with a built-in moisture barrier Eliminates the process of applying an additional waterproofing membrane

Installs in 3 easy steps (view installation video at www.wetareas.com.au)

Measure & Cut - Fasten - Caulk & Tape

DensShield® FEATURES	DensShield® ADVANTAGES	DensShield® BENEFITS				
PROTECTS TILE INSTALLATION						
 Unique grey heat cured acrylic coating Moisture resistant treated core The only 15.9mm Type X premium performance tile substrate that achieves one- and two- hour fire ratings Mould resistant – Score 10 GREENGUARD Microbial resistant 	 Protects tile installation and stops moisture migration into wall cavity Outperforms cement backers by stopping moisture at the surface Virtually no wicking compared to other backer boards No additional waterproofing membrane required 	 Ideal for floors, showers, kitchens, countertops and other wet, high-humidity areas Fewer call backs 				
EASY TO INSTALL						
 Scores and snaps easily with a standard utility knife Light weight; 30% lighter than the leading cement boards brands (12.7mm comparison) Easy to handle sizes 	 Non-abrasive to fixtures in tub and shower installations Can fasten close to edge for easy application over plywood flooring and wall framing 	• Lower installed costs (NAHB study showed DensShield® Tile Backer 46% faster to install than cement board)				
STRONG ABD DURABLE						
• Flexural strength is approximately the same in both directions	Wall and ceiling applications can be either parallel or perpendicular to the supporting member	• Fewer panel joints				
LIFETIME LIMITED WARRANTY						
 When used in residential tile installations* Backed by Georgia-Pacific, a world leader in build 20-Year limited warranty for commercial installation 	Peace of mind for contractor and home owner					
*See warranties for complete terms, conditions and limitations. For a copy of the warranty or for technical details, call 1300 526 879						




DensShield® Industry Approved Testing

- Percolation Test—ICBO-ES
- Shower Test—CTC-Geotek
- Water Vapour Transmission—ASTM E96
- Moisture-Wick Testing—CTI-T83
- Mould Resistance Testing—ASTM D 3273
- Sustainable Product Testing—ASTM D 6329-98
- Floor Testing—Robinson Floor Test ASTM C 627
- Adhesion Bond Testing—CTC-Geotek
- Conforms to IRC and IBC codes
- Manufactured to meet ASTM C1178
- Product Approval by ICC-ES

Tile Backer Board







GREY, HEAT-CURED ACRYLIC SURFACE COATING

The grey coating on the tile application side of DensShield Tile Backer is a multi-coat, heat-cured, copolymer acrylic that provides a moisture barrier that stops water and retards moisture at the surface. This coating also serves as an ideal bondable surface for a variety of tile setting mortars and mastics. Because of this coating, no additional moisture barrier is required or recommended behind DensShield Tile Backer to protect the wall cavity.

FIBREGLASS MATS ON BOTH SIDES OF PANEL

To add strength and rigidity, the core has fibreglass mats on both sides of the panel that are impregnated into the panel in the manufacturing process. This construction, combined with the tilside acrylic coating, eliminates the possibility of delamination associated with paper-faced gypsum board. The added strength also means that DensShield Tile Backer can be fastened either vertically or horizontally to the supporting framing members, which can result in fewer joints.

MOISTURE RESISTANT TREATED CORE

The high-performance, moisture-resistant core of DensShield Tile Backer is specially treated to add further moisture protection. The specially engineered core doesn't allow DensShield Tile Backer panels to wick moisture like competing cement board products.

DensShield® Waterproof Tile Backer Board is suitable for commercial and residential use and has been tested, appraised and certified by BRANZ and meets the below performance of the BCA

National Construction Code series (NCC 2019)
- Building code of Australia (BCA)

BCA Volume 1—Class 2 to 9 Buildings
Part F1—Damp and Weatherproofing

BCA Volume 2—Class 1 and 10 Buildings Part 2.4—Health and Amenity

Meets and exceeds AS3740-2004









How it Works

Its as simple as 1,2,3. Follow the steps shown to purchase or order your product. If you need further advice, speak to a team member at the Special Orders Desk in-store.

1. Select The Product You Want

View the extensive range available in this brochure or online. Use the number shown on page 2 to order your product online or in-store.

Fineline	Size/Outlet Position
177588	Tile-Over Tray 900 x 900 Centre Outlet (3 Sided)
177589	Tile-Over Tray 900 x 900 Rear Outlet (3 Sided)
177595	Tile-Over Tray 900 x 900 Rear Outlet (4 Sided)
177596	Tile-Over Tray 900 x 1100 Rear Outlet (4 Sided)

2. Order at the Special Orders Desk or Online

After you have selected the product you want, take this brochure to the Special Orders Desk or order online at bunnings.com.au

3. Get It Home

Pick-Up In-Store

If you decide to pick-up in-store and need help to get it home, you can:

- borrow a courtesy trailer
- hire a vehicle

Check with your local Bunnings store for availability

