Eternity Continuous Flow Gas Water Heaters

Product Specifications



Chromagen's Eternity continuous flow gas water heaters feature state of the art technology and materials to provide superior energy efficiency, performance and long service life. Eternity now features a high 6 Star energy rating, for even lower running costs and greenhouse gas emissions.

Special Features:

- High 6 Star energy rating
- o 20 & 26 litre per minute models
- o Natural gas or Propane / LPG models
- o 'Hot Flow' technology to minimize gas, water & electricity waste
- o 100% Solar compatible
- o Can be configured for commercial applications
- Frost protection
- o Electronic ignition
- 50°C pre-set models available upon request*
- o 10 year heat exchanger warranty / 3 years parts & labour

#Models factory pre-set to 50°C supply hot water at a maximum 50°C at all outlets in accordance with AS 3498. Some applications may require tempering. Refer to AS/NZS 3500:4 and local regulations & requirements in your state. Models for 60°C and higher must have a tempering valve installed in accordance with AS/NZS 3500:4.

Remote Controllers			
Controller Type	Chromagen Pt No	Available Temperature settings	
Main/Kitchen	P0510	37,38,39,40,41,42,43,44,45,46,47,50,55	
Bathroom	P0512	37,38,39,40,41,42,43,44,45,46,47,50	
Ensuite	P0511	37,38,39,40,41,42,43,44,45,46,47,50	


Physical Dimensions and Characteristics				
Eternity Model	T20	T26		
Energy Star Rating		6		
Thermal Efficiency (%)	80.5	81.7		
Flue System	Forced Flued External			
Rating (I/min @ 25°C rise)	20	26		
Nominal Gas Consumption (MJ/h)	160	195		
Weight (kg)	15.7	17.2		
Height (mm)	542			
Width (mm)	350			
Depth (mm)	170	230		
Water connection diameter (mm)	15 BSP			
Gas connection diameter (mm)	20 BSP			
Water Pressure minimum (kPa)*	200			
Water Pressure maximum (kPa)	1200			
Water Pressure Optimal (kPa)	500			
Anti-frost	Standard			
Power Supply Mains Voltage (AC)	240			
Power Supply Controller Voltage (DC)	12			
Ignition	Elect	Electronic		
Gas Types	Nat Gas / LPG			
Housing Colour	Beige			






- If controllers are optioned, a Main Controller is required as the master unit
- O Maximum of one of each type of controller (i.e. max 3 remotes)
- Not suitable for use with solar hot water systems

Recess Box Specifications

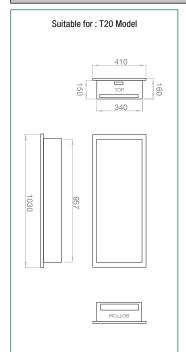

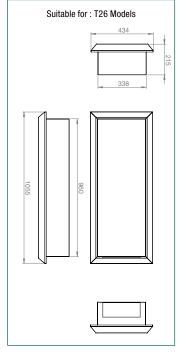

This revision supersedes all previous versions. All details in this document are accurate at time of publishing. Product specifications may change without notice. For the latest product details and specifications, please visit our website - www.chromagen.com.au



^{*}Performance of Eternity water heater will be reduced below 350kPa