

#### 2 X 18V LITHIUM ION




### **INSTRUCTION MANUAL**

### **SPECIFICATIONS**

Voltage:	18V x 2
No Load Speed:	11,000 - 21,000/min
Max. Air Speed:	150km/hr
Max. Air Volume:	810m <sup>3</sup> /hour
Weight:	2.5kg

ozito.com.au

# 5 YEAR



### WHAT'S IN THE BOX



Cordless Jet Blower

TS)

Blower Nozzle



Shoulder Strap

Battery & Charger sold separately

## PXCJBLS-018

## WARRANTY

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO YOUR NEAREST BUNNINGS WAREHOUSE WITH YOUR BUNNINGS REGISTER RECEIPT. PRIOR TO RETURNING YOUR PRODUCT FOR WARRANTY PLEASE TELEPHONE OUR CUSTOMER SERVICE HELPLINE:

### Australia 1800 069 486 New Zealand 0508 069 486

TO ENSURE A SPEEDY RESPONSE PLEASE HAVE THE MODEL NUMBER AND DATE OF PURCHASE AVAILABLE. A CUSTOMER SERVICE REPRESENTATIVE WILL TAKE YOUR CALL AND ANSWER ANY QUESTIONS YOU MAY HAVE RELATING TO THE WARRANTY POLICY OR PROCEDURE.

### WARNING

## The following actions will result in the warranty being void.

- If the tool has been operated on a supply voltage other than that specified on the tool.
- If the tool shows signs of damage or defects caused by or resulting from abuse, accidents or alterations.
- Failure to perform maintenance as set out within the instruction manual.
- If the tool is disassembled or tampered with in any way.

The benefits provided under this warranty are in addition to other rights and remedies which are available to you at law.

Our goods come with guarantees that cannot be excluded at law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired

or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Generally you will be responsible for all costs associated with a claim under this warranty, however, where you have suffered any additional direct loss as a result of a defective product you may be able to claim such expenses by contacting our customer service helpline above.


### **5 YEAR REPLACEMENT WARRANTY**

Your Product is guaranteed for a period of 60 months from the original date of purchase and is intended for DIY (Do It Yourself) use only. If a product is defective it will be replaced in accordance with the terms of this warranty. **Lithium Ion batteries and chargers are covered by a 36 month warranty**. Warranty excludes consumable parts, for example: blower tube.

## **KNOW YOUR PRODUCT**

### **CORDLESS JET BLOWER**

- 1. Blow Nozzle
- 2. Variable Speed Dial
- 3. Turbo Boost Button
- ON/OFF Trigger
  Handle
- Boost Button
- 6. Battery Seating

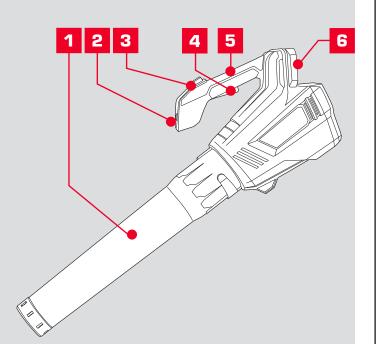

### ACCESSORIES

7. Shoulder Strap



### **BATTERY & CHARGER (sold separately)**

This tool is compatible with all battery and chargers from the Ozito Power X Change Range.

### **ONLINE MANUAL**

Scan this QR Code with your mobile device to take you to the online manual.






## **SETUP & PREPARATION**

## 1. ASSEMBLY


WARNING: ENSURE THE TOOL IS SWITCHED OFF AND BATTERIES DISCONNECTED BEFORE PERFORMING ANY OF THE FOLLOWING TASKS.

### Fitting the Jet Blower Nozzle

 Slide the nozzle over the blower outlet, aligning the blower nozzle slot with the tab on the outlet of the jet blower.




2. Rotate the blower nozzle to lock in place.




### Fitting the Shoulder Strap

1. Ensure the shoulder strap is clipped onto the top of the jet blower.



2. To unclip the jet blower, press either side of the buckle.



**Note:** To use the shoulder strap simply slide the strap over your shoulder so that some of the weight of the jet blower can be taken by your shoulder.

WARNING! DO NOT USE ANY ATTACHMENTS OR ACCESSORIES NOT RECOMMENDED BY THE MANUFACTURER OF THIS PRODUCT, AS IT CAN RESULT IN SERIOUS PERSONAL INJURY.


### 2. BATTERY & CHARGING (SOLD SEPARATELY)


#### CAUTION: THE CHARGER FOR THIS PRODUCT SHOULD BE PROTECTED BY A RESIDUAL CURRENT DEVICE (RATED AT 30mA OR LESS).

The purchased battery will be shipped in a low charge condition, and requires charging prior to use. Allow several cycles of charging and discharging (through use of the tool) for the battery to reach its optimum performance / runtime.


#### Charging your lithium ion battery - Fast Charger

- 1. Connect the charger into a mains power outlet.
- 2. The charger LED will flash green showing power is being supplied to the charger.
- With the charger sitting on a flat surface, align the raised ribs on the battery with the recess in the charger and slide onto the charger ensuring a firm connection.






 The charger LED will illuminate red signifying that the battery is charging.




5 .The charger LED will illuminate green once the battery is fully charged.




Charger LED Indicator				
LED Indicator	Situation			
GREEN (Flashing)	Stand By (no battery pack is inserted)			
RED (Flashing)	Battery is charging (low charge)			
RED (Illuminated)	Battery is charging (mid charge)			
GREEN (Illuminated)	lluminated) Battery is fully charged			
BOTH (Illuminated)	ninated) Battery pack is too hot or too cold (charging will begin automatically when battery reaches correct charging temperature).			
BOTH (Flashing)	Defective battery. Never charge a defective battery pack! Remove battery pack from charger.			

#### Charging your lithium ion battery - Eco Charger

- 1. Connect the charger into a mains power outlet.
- 2. The charger LED will flash green showing power is being supplied to the charger.



3 With the battery sitting on a flat surface, align the raised ribs on the battery with the recess in the charger and slide onto the battery ensuring a firm connection.



- 4 The charger LED will illuminate red signifying that the battery is charging.
- 5. When removing the charger from the battery, first press the battery release tab, then slide the charger from its position.



Charger LED Indicator				
LED Indicator	Situation			
GREEN (Flashing)	Stand By (no battery pack is inserted)			
RED (Illuminated)	Battery is charging (low charge)			
GREEN (Illuminated)	Battery is fully charged			
RED (Flashing)	Battery or Charger fault			
RED & GREEN (Flashing)	Battery pack is too hot or too cold (remove battery from charger and store at room temperature 20°C. Insert battery again when at correct charging temperature). If this happens again, the battery is defective and needs to be replaced.			

#### **Battery Charge Indicator**

The purchased battery is equipped with a battery charge indicator to show the state of the battery charge.

Press the charge indicator button and look to see which LED lights.







Low state of charge, requires charging soon.



Mid state of charge.



Note: The battery needs to be removed from the tool to check the state of charge.


**Note:** The battery will not develop a memory, it does not have to be fully discharged before recharging.

## **OPERATION**


### 3. INSERTING & REMOVING THE BATTERIES

### Inserting a Battery (not included) into the Jet Blower

- Note: Always use 2 batteries of the same capacity and same charge state with the jet blower.
- 1. Align the ribs of the battery with the recess in the jet blower.




2. Slide the battery in so that it clicks into place.




#### Removing a Battery from the Jet Blower

1. Press and hold the battery release tab to release the battery.



2. Slide the battery out.



## 4. CONTROLS & OPERATION

WARNING:: DO NOT SWITCH THE JET BLOWER ON IN ENCLOSED OR POORLY VENTILATED SPACES OR IN THE PRESENCE OF FLAMMABLE AND/OR EXPLOSIVE LIQUIDS, GASES AND POWDERS.

#### Switching On and Off

- Squeeze the on/off trigger to start. Motor will start after short delay.
- 2. To stop operation, release the on/off trigger.



#### Variable Speed Dial

- 1. To increase the air speed rotate the dial to the "MAX" setting.
- 2. To lower the air speed rotate the dial to the "LOW" setting.

#### **Turbo Speed Button**

- 1. Press Turbo Boost Button for maximum air speed.
- 2. Release button to return to normal air speed.

#### Blowing

The jet blower is ideal for blowing leaves, grass clippings and other debris.


Hold the blower firmly, squeeze the on/off trigger, point the jet of air in front of you and move forward slowly. Move the blower from side to side, with the nozzle several inches above the ground.


Be careful where you point the jet of air as it can move heavy


material and cause injury or damage to bystanders.

**Note:** Be aware of other people and animals in the area where you are to be operating the Jet blower.

Note: Avoid collisions with hard objects which could damage your machine.







# **BATTERY PROTECTION SYSTEM**

The tool is equipped with the battery protection system, which helps to ensure a long service life.

The output power automatically cuts off during operation when the tool and/or battery are placed under the following situations:

• When the tool is overloaded:

If this occurs, release the trigger switch and remove causes of overload, then pull the switch trigger again to restart.

• When the remaining battery capacity becomes low: Recharge the battery pack.

Note: The battery protection system does not in any way damage the tool.

Note: The indicated capacity may be lower than the actual level during use or immediately after using the tool.

Note: Always use 2 batteries of the same capacity and same charge state with the jet blower.

## MAINTENANCE

#### WARNING! ALWAYS ENSURE THE TOOL HAS COMPLETELY STOPPED AND THE BATTERIES ARE REMOVED PRIOR TO ANY MAINTENANCE.

- Keep air intake clean and air vents free of debris to avoid overheating the motor.
- Do not use cleaning agents to clean the plastic parts of the tool.
  A mild detergent on a damp cloth is recommended. Water must never come into contact with the tool.
- If the blower vibrates abnormally, stop motor immediately. Abnormal vibration usually indicates a mechanical problem continued operation could lead to injury or damage.
- · No lubrication is necessary as the motor is equipped with lifetime-lubricated bearings.

Note: Ozito Industries will not be responsible for any damage or injuries caused by the repair of the blower by an unauthorised person or by mishandling of the blower. This tool is designed for DIY use - use in commercial or industrial environments will void the warranty.

# TROUBLESHOOTING

Problem	Cause	Remedy	
Blower is not starting	Battery is low in charge.	Charge battery	
	Battery not inserted properly.	Insert battery pack correctly.	
Blower is not operating at full capacity	Variable speed set low.	Inspect variable speed dial and increase as necessary.	
Motor stops while blowing	Battery has no power.	Charge battery.	

# **SPARE PARTS**

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse.

For further information, or any parts not listed here, visit

www.ozito.com.au or contact Ozito Customer Service:

Australia 1800 069 486

New Zealand 0508 069 486

E-mail: enquiries@ozito.com.au

## A BATTERY AND CHARGER SAFETY WARNINGS

## THIS MANUAL CONTAINS IMPORTANT SAFETY AND OPERATING INSTRUCTIONS FOR YOUR BATTERY CHARGER.

- Before using the charger read all instructions and cautionary markings on the charger, battery pack and the product using the battery pack.
   This charger is not intended for any uses other than charging rechargeable batteries. Any other use may result in risk
- This charge it is not intended for any uses ourier than charging rechargeable dattenes. Any ourier use may result in risk of fire, electric shock or electrocution.
   Do not place any object on too of the charger or place the charger on a soft surface that may result in excessive
- Do not place any object on top of the charger or place the charger on a soft surface that may result in excessive internal heat. Place the charger in a position away from any heat source.
- To reduce risk of damage to the electric plug and cord, pull by the plug rather than the cord when disconnecting the charger.
- Make sure the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- An extension cord should not be used unless absolutely necessary. Use of an improper extension cord could result in the risk of fire, electric shock or electrocution.
   Do not operate the charger if it has received a sharp blow, been dropped or otherwise damaged in any way. Have it
- Do not operate the charger if it has received a sharp blow, been dropped or otherwise damaged in any way. Have it checked by an electrician or power tool repairer.
   Do not disassemble charger. Take it to an electrician or power tool repairer when service or repair is required. Incorrect
- reassembly may result in a risk of electric shock, electrocution or fire. 9. To reduce risk of electric shock, unplug the charger from the outlet before attempting any cleaning. Removing the
- battery pack will not reduce this risk. 10. Never attempt to connect 2 chargers together.
- D0 NOT store or use the tool and battery pack in locations where the temperature may reach or exceed 40°C (such as inside sheds or metal buildings in summer).
- The charger is designed to operate on standard household electrical power (240 volts). Do not attempt to use it on any other voltage!
- The battery pack is not fully charged out of the carton. First read the safety instructions and then follow the charging notes and procedures.
   The longest life and best performance can be obtained if the battery pack is charged when the air temperature is
- 14. The longest life and best performance can be obtained if the battery pack is charged when the air temperature is between 18 24°C. Do not charge the battery pack in an air temperature below 10°C or above 40°C. This is important and will prevent damage to the battery pack.
- 15. Do not incinerate the battery pack even if it is seriously damaged or is completely worn out. The battery can explode in a fire.
- Never attempt to open the battery pack for any reason. If the plastic housing of the battery pack breaks or cracks, immediately discontinue use and do not recharge.
- 17. During charging, the battery must be placed in a well ventilated area

## **DESCRIPTION OF SYMBOLS**

v	Volts		Hz	Hertz	
~	Alternating current		w	Watts	
dc/ <del></del>	Direct current		Ø	Diameter	
mA	Milliamperes		n₀	No load speed	
/min	Revolutions or reciprocation per minute			Double insulated	
3	Read instruction manual			Warning	
$\bigotimes$	Regulator compliance mark		3	Wear eye and ear protection.	
	Do not use in the rain or leave the blower outdoors while raining.				
Keep bystanders away. Do not operate whilst people especial children or pets are in the area.					

# **CARING FOR THE ENVIRONMENT**



Power tools that are no longer usable should not be disposed of with household waste but in an environmentally friendly way. Please recycle where facilities exist. Check with your local council authority for recycling advice.



Recycling packaging reduces the need for landfill and raw materials. Reuse of recycled material decreases pollution in the environment. Please recycle packaging where facilities exist. Check with your local council authority for recycling advice.

## **ELECTRICAL SAFETY**



#### WARNING! When using mains-powered tools, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, per injury and material damage.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool. Save these instructions and other documents supplied with this tool for future reference.

The charger has been designed for 230V and 240V only. Always check that the power supply corresponds to the voltage on the rating plate

Note: The supply of 230V and 240V on Ozito tools are interchangeable for Australia and New Zealand



This tools charger is double insulated in therefore no earth wire is required

If the supply cord is damaged, it must be replaced by an electrician or a power tool repairer in order to avoid a hazard. Note: Double insulation does not take the place of normal safety precautions when operating this tool. The insulation system is for added protection against injury resulting from a possible electrical insulation failure within the tool. The power supply for this products charger should be protected by a residual current device (rated at 30mA or less). A residual current device reduces the risk of electric shock.

\Lambda GENERAL POWER TOOL SAFETY WARNINGS

WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cord r tool. pc

- . 1. Work area safetv
- Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes. b.
- Keep children and bystanders away while operating a power tool. Distractions can cause you to lose contro
- 2. Electrical safety
- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will educe risk of electric shock
- b. Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded. Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk C.
- of electric shock. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power
- tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock. е
- If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock. f
- 3. Personal safety
- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol Stav or medication. A moment of inattention while operating power tools may result in serious personal injury
- Use personal protective equipment. Always wear eye protection. Protective equipment such as dust b. non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting c to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.
- Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left d. attached to a rotating part of the power tool may result in personal injury
- Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situa

- Dress properly. Do not wear loose clothing or iewellery. Keep your hair, clothing and loves away from moving parts. Loose clothes, jewellery or long hair car be caught in m
- g. If devices are provided for the connection of dust extraction and collection facilities ensure these are connected and properly used. Use of dust collection can reduce dust-related haza 4. Power tool use and care
- Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.
- Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be b. controlled with the switch is dangerous and must be repaired.
- Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
- h Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
- Maintain power tools. Check for misalignment or binding of moving parts, breakage of e parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- f. Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power g. operations different from those intended could result in a hazardous situation tool for
- 5. Battery tool use and care
- Recharge only with the charger specified by the manufacturer. A charger that is suitable for one ne of battery pack may create a risk of fire when used with another battery pack
- Use power tools only with specifically designated battery packs. Use of any other battery packs may b. create a risk of iniury and fire
- When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects, that can make a connection from c. one terminal to another. Shorting the battery terminals together may cause burns or a fire h
- Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Liquid ejected from the battery may cause irritation or burns 6. S
- Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintaine

## **BLOWER SAFETY WARNINGS**

- Always wear adequate protective clothing when operating the blower to avoid injuries to face, eyes, hands, feet, head or hearing. Use safety glasses or a face shield, high boots or sturdy shoes, long trousers, work gloves, a hard hat and ear defenders.
- Do not start the tool when it is upside down or when it is not in the operating position.
- Switch the motor off and remove the battery when the tool is not being used, left unattended, being cleaned or being moved from one place to another.
- Do not operate the tool near people, especially children or pets. Turn it off if they get too close. Maintain a safe distance of at least 5m from other people when using the tool.
- Never direct the blower direction nozzle towards bystanders or pets. Never blow debris in the direction of bystanders or pets. The operator is responsible for accidents or hazards occurring to other people or their property.
- Do not handle the battery or the tool with wet hands and do not use the tool in the rain.
- Keep all the air intakes and the blower tube free of dust, lint, hair and other material that may cause a reduction in air flow.
- Keep a balanced and stable stance while using the tool. Do not switch on the tool in enclosed or poorly ventilated spaces or in the presence of inflammable and/or explosive substances such as liquids, gasses and powders.
- Do not get distracted and always concentrate on what you are doing. Use common sense. Never operate the tool when you are tired, sick or under the influence of alcohol or other drugs.

- Do not operate this appliance with long loose hair or loose fitting jewellery. Tie long loose hair back and remove loose fitting jewellery.
- Only operate the tool during broad daylight or with adequate artificial light.
- When the tool is not in use, store it in a dry place and out of reach of children.
- Only use the tool according to the instructions given in this manual.
- Check regularly that the screws are tight.



WARNING! When servicing, use only identical replacement parts. Use of any other parts may create a hazard or cause product damage. To ensure safety and reliability, all repairs should be performed by a qualified service technician.



WARNING! This appliance is not intended for use by young or infirm persons unless supervised by a responsible person to ensure that they can use the appliance safely. Young children should be supervised to ensure that they do not play with the appliance.